

The logo features the text "HeedGROUP" in a bold, sans-serif font. "Heed" is in red and "GROUP" is in white. The text is set against a black background that has a curved, semi-circular shape on the left side, with a red outline following the curve.

**HeedGROUP**

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead



## SUSPENDED CEILING

Suspended ceiling is a ceiling covering system preferred in order to provide sound and heat insulation, hide electrical wiring, plumbing installations, avoid possible hazards by uncovered systems and get a decorative view. The most important components of the system are the carrier ceiling profiles. Selection of profile may vary depending on the choice of system. LMS has all connection details and production diversity for double frame suspended ceiling systems, suspended ceiling systems with bracket, suspended ceiling systems with omega profiles and single frame suspended ceiling systems.

## SUSPENDED CEILING SYSTEMS

### TYPES

#### Suspended ceiling applied to reinforced concrete floor

This is a type of suspended ceiling applied to reinforced concrete surface by means of metal carrier frame and steel wall plugs.

#### Suspended ceiling applied to hollow-tile floor slab

This is a type of suspended ceiling applied to ribbed joints between the hollow blocks by means of metal carrier frame and steel wall plugs.

#### Suspended ceiling applied to timber floor

This is a type of suspended ceiling where one edge of metal carrier frame is put over the flooring and fastened with nut.

#### Suspended ceiling applied to steel floor

This is a type of suspended ceiling applied through fastening metal carrier frame to the existing steel flooring by means of welding and rivet.

### FEATURES

- Provides a decorative view.
- Facilitates installation of electrical and plumbing lines.
- Minimizes risk by adapting to the movements of the building during an earthquake.
- It is light, does not load weight to carrier system.
- Contributes to sound and heat insulation.
- Gains a decorative surface by concealing electrical wiring and plumbing installations.
- Switch ceiling detail is used to provide cove lighting.
- At least 40% lighter compared to concrete ceiling.
- Can be produced at any sizes in UMS production lines according to project details.

### FIELDS OF USE

Business and shopping centers

- Hospitals
- Industrial constructions
- Houses
- Office and management buildings
- Restored and renovated buildings
- Hotels
- Performance centers [Theatres and cinema halls, conservatories etc.]



#### Ceiling U Profile

It is a non-load bearing ceiling profile needed for alignment of carrier Ceiling C profiles in the metal construction built to make suspended ceiling and for leveling of the system.



#### Ceiling C Profile

Divided into two as main carrier profile and auxiliary carrier profile. Main carrier Ceiling C profile is the term used for Ceiling C profile hung on hanger clip and placed in the upper part of the system. Auxiliary Carrier Ceiling C Profile is the term used for Ceiling C Profile that is fastened to the main carrier Ceiling C profile by the help of clip and on which plasterboards are mounted.



#### Omega Ceiling U Profile

It is a main carrier ceiling profile to which auxiliary carrier Omega profiles are fastened and which is hung onto the ceiling using hanging clip or L corner profile.



#### Omega Profile

It is a ceiling profile that forms the base for plasterboard assembly by being fastened to main carrier Omega Ceiling U profile and that carries gypsum plasterboards.



#### Ceiling C47 Profile

It is a carrier ceiling profile which is fastened to the reinforced concrete ceiling by means of special clip or hanger clip and where plasterboards are mounted to.



#### Extension Piece

An accessory used to space two Ceiling C Profiles.



#### Wall plug-screw

A fastener used to wall mount Ceiling U profiles.



#### Steel Wall Plug

A fastener used to wall-mount suspension rod.



#### Suspension Rod

An accessory used to carry spring hangers.



#### Hanger clip

Accessory used to fast Main Carrier Ceiling C profiles.



#### Bracket

Accessory used to fast Main Carrier Ceiling C profiles.



#### Sound Insulation Tape

Insulation tape applied to the face of Ceiling U Profile that touches the wall in order to provide sound insulation for vibrations caused by construction.



#### Sharp Point Screw

In plasterboard applications, a type of screw used to fix plaster boards onto auxiliary carrier Ceiling C profiles up to 0.7 mm wall thickness.



#### Metal-Metal Screw

Type of screw used to mount extension piece into auxiliary and main profiles or brackets into main profiles.



#### Clip

Accessory used to get Auxiliary Ceiling C profiles carried by main carrier Ceiling C profiles.



#### Insulation Material

Mineral wool of different density and thickness values used to increase heat insulation, sound insulation and resistance to fire.



#### Plasterboard

Multi-purpose construction boards, coated with cardboard on both faces, with plaster in the cores. There are 4 different types of plasterboards which are standard, water resistant, fire resistant and water and fire resistant plasterboards. Due to high air permeability provides significant contribution in lowering ambient humidity and in ensuring sound and heat insulation when used with proper insulation materials.



#### Joint Tape

A type of netting used to equally stock joints remaining between plasterboards using joint sealer and to prevent cleavage at the joint points.



## APPLICATION TYPES



## DOUBLE FRAME SUSPENDED CEILING APPLICATION

It is a ceiling system consisting of auxiliary components like hanger clip, suspension rod, clip, and Ceiling U, Ceiling C Profiles and plasterboards, mounted on these profiles. Ceiling C Profiles are divided into two as main carrier profile and auxiliary carrier profile. Ceiling C profile which is directly fastened to suspension rod and hanger clip is called main carrier profile while Ceiling C profile which provides a surface for fastening plaster boards is called auxiliary carrier profile. Ceiling U profile is intended to provide guidance for main carrier Ceiling C profiles and form a framework for auxiliary carrier C profiles.

## APPLICATION

UMS has specified limit values to be taken into consideration for application of double frame suspended ceiling on the next page. Analysis table on the next page can be consulted for the quantity of materials to be consumed when single layer plasterboard is used.



For proper application,

## LIMIT VALUES FOR DOUBLE FRAME SUSPENDED CEILING

DESCRIPTION	LIMIT VALUE
Profile Size:	27/60/27 mm (Main and Auxiliary Carrier Ceiling C Profile)
Main Carrier Profile Range:	must be maximum 1100 mm
Suspension Rod Spacing:	must be maximum 1200 mm
Auxiliary Carrier Profile Spacing:	must be maximum 500 mm
Screw Spacing:	must be maximum 500 mm
Distance of the First and Last Main Carrier Profile to the Parallel Wall:	must be maximum 150 mm
Distance of the First and Last Auxiliary Carrier Profile to the Parallel Wall:	must be maximum 100 mm
Distance of the First and Last Suspension Rod to Perpendicular Wall:	must be maximum 250 mm


\*UMS recommends 900 mm and below for suspension rod axial spacings.

## MATERIAL ANALYSIS FOR DOUBLE FRAME SUSPENDED CEILING CONSTRUCTED USING

DESCRIPTION	1 m² CONSUMPTION
Plasterboard	1,05 m²
Ceiling C Profile:	3,6 m
Ceiling U Profile:	1,3 m
Hanger Clip:	1,7 pcs
Suspension Rod:	1,7 pcs
Clip:	5,8 pcs
Extension Piece:	0,7 pcs
Joint Tape:	1,8 m
Drywall Screw:	16 pcs
Steel Wall Plug:	1,7 pcs
Plastic Wall Plug, Shim, Screw:	1 pcs
Jointing Plaster:	0,4 kg
Satin Finishing Plaster:	1 kg/ m²
Insulating Tape:	1,3 m
Insulating Material (Optional):	1,05 m²
Corner Profile (Corner Tape):	According to technical details of the railing

\*Consumptions may vary depending on project details.

Order of operations given below should be followed for a complete application.

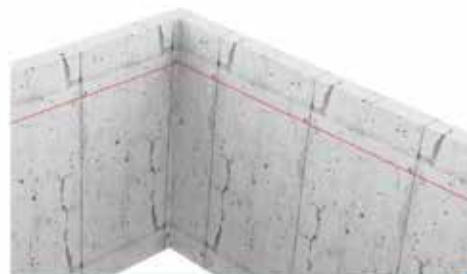

## STEP 1

Suspended ceiling elevation is determined using auxiliary equipment including laser, chalk line, water balance.



## STEP 4

Suspension rods are cut in accordance with the project so that they do not exceed 2000 mm in length and mounting is completed by pinning them into the existing wall plugs with nuts.




## STEP 2

Ceiling U profiles, in accordance with suspended ceiling elevation, are fixed onto the walls using outside wall plugs and screws, with a distance of 50 mm from both ends, with a spacing of 600 mm, as insulating tape applied to the parts that touch the wall.



## STEP 5

All hanger clips are hung on suspension rods in accordance with suspended ceiling bottom elevation.

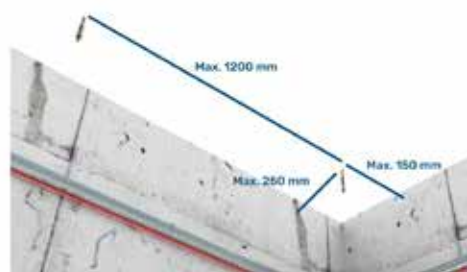


## STEP 3

Main Corner Ceiling C Profile is planned parallel to the lengthier wall of the room, the first suspension rod position is marked on the ceiling surface, taking maximum 150 mm from the first and last profile walls and maximum 250 mm from the perpendicular walls. The second suspension rod is taken maximum 1200 mm from the perpendicular wall and then positions of suspension rods are marked on the ceiling surface so that a distance of 1200 mm is left between each suspension rod. Marked suspension rod positions are drilled and steel wall plugs are mounted.



## STEP 6

Main corner Ceiling C profiles are positioned to be over the Ceiling U profiles and not to touch the wall and they are affixed to hanger clips, locked and suspended. (Profiles should not be screwed to each other after mounting.)

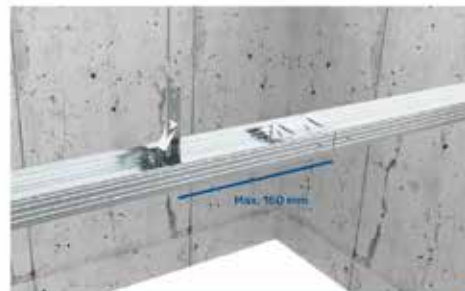


## STEP 7

In case the length of Main Carrier Ceiling C Profile is shorter than application distance, two Ceiling C Profiles are attached using extension piece. Places of extension piece should be set so as to be maximum 150 mm to the hanger clip.



## STEP 8


Auxiliary Carrier Ceiling C Profiles are fastened to Main Carrier Ceiling C Profiles using clip, with a distance of maximum 500 mm to each other.

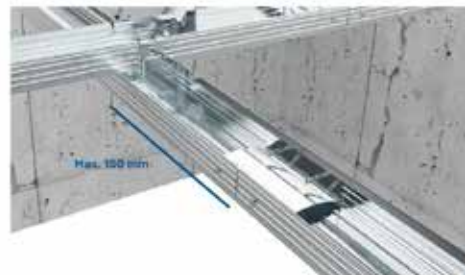

## STEP 9

For lengths where a single part cannot pass through at joining points of Auxiliary Carrier Ceiling C profiles, channel connectors are used. Channel connectors are fixed to both profiles from the sides that touch the profile with metal-metal screws and aligned zigzag in parallel profiles. Place of channel connectors should be maximum 150 mm from the clip.

Double frame suspended ceiling system is completed.

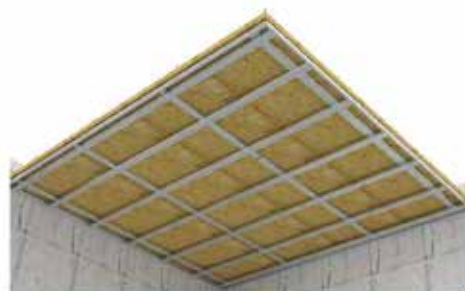

\*Following steps are written with reference to plaster board application. Order and content of steps may vary when different materials are used.

## STEP 10

Insulating materials are placed on Main Carrier profiles in accordance with the project.




## STEP 11

Plaster boards are cut according to the project. Cut plaster boards are mounted onto Auxiliary Carrier Ceiling C profiles in a zigzag way with suitable screws and spaces between screws. Plaster board joints are covered using joint tapes of appropriate thickness and width according to the project.



## STEP 12

Covered joints and screw heads are filled with suitable jointing plaster, after the filling plaster dries out, treatment area is sanded and leveled with the board.



\*UMS recommends 900 mm and below for suspension rod axial spacing.



**CARRELAGE LOAD CARRYING VALUES FOR 0,60 MM CONSTRUCTION**

0,60 mm		Suspension Rod Spacing (a)			
		Load Amount (kg/m <sup>2</sup> )			
Main Profile Spacing (L)		≤ 15	≤ 30	≤ 45	≤ 60
	600 mm	1200	1150	1000	850
	700 mm	1150	1100	900	800
	800 mm	1100	1050	850	750
	900 mm	1050	1000	800	700
	1000 mm	1000	950	750	-
	1100 mm	950	900	-	-
	1200 mm	900	850	-	-

Carrelage Load Carrying Values (kg/m<sup>2</sup>) for Construction with Auxiliary Profile Spacing of 400 mm - Screw Spacing of 300 mm - Material Thickness of 0,60 mm

\*Values given in the tables are calculated by UMS with reference to AISI S100-2007 and Eurocode 3 Part 1.3.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 300 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.

If auxiliary profile spacing is 500 mm.

**CARRELAGE LOAD CARRYING VALUES FOR 0,45 MM CONSTRUCTION**

0,45 mm		Suspension Rod Spacing (a)			
		Load Amount (kg/m <sup>2</sup> )			
Main Profile Spacing (L)		≤ 15	≤ 30	≤ 45	≤ 60
	600 mm	1200	1050	900	750
	700 mm	1150	1000	850	700
	800 mm	1100	950	800	650
	900 mm	1050	900	750	-
	1000 mm	1000	850	700	-
	1100 mm	950	800	-	-
	1200 mm	900	750	-	-

Carrelage Load Carrying Values (kg/m<sup>2</sup>) for Construction with Auxiliary Profile Spacing of 500 mm - Screw Spacing of 300 mm - Material Thickness of 0,45 mm

\*Values given in the tables are calculated by UMS with reference to AISI S100-2007 and Eurocode 3 Part 1.3.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 300 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.

**CARRELAGE LOAD CARRYING VALUES FOR 0,50 MM CONSTRUCTION**

0,50 mm		Suspension Rod Spacing (a)			
		Load Amount (kg/m <sup>2</sup> )			
Main Profile Spacing (L)		≤ 15	≤ 30	≤ 45	≤ 60
	600 mm	1200	1100	950	800
	700 mm	1200	1050	850	750
	800 mm	1150	1000	800	700
	900 mm	1100	950	750	650
	1000 mm	1050	900	700	-
	1100 mm	1000	850	-	-
	1200 mm	950	800	-	-

Carrelage Load Carrying Values (kg/m<sup>2</sup>) for Construction with Auxiliary Profile Spacing of 500 mm - Screw Spacing of 300 mm - Material Thickness of 0,50 mm

\*Values given in the tables are calculated by UMS with reference to AISI S100-2007 and Eurocode 3 Part 1.3.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 300 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.

**CARRELAGE LOAD CARRYING VALUES FOR 0,60 MM CONSTRUCTION**

0,60 mm		Suspension Rod Spacing (a)			
		Load Amount (kg/m <sup>2</sup> )			
Main Profile Spacing (L)		≤ 15	≤ 30	≤ 45	≤ 60
	600 mm	1200	1150	1000	850
	700 mm	1200	1100	900	800
	800 mm	1200	1050	850	750
	900 mm	1150	1000	800	700
	1000 mm	1100	950	750	-
	1100 mm	1050	900	-	-
	1200 mm	1000	850	-	-

Carrelage Load Carrying Values (kg/m<sup>2</sup>) for Construction with Auxiliary Profile Spacing of 500 mm - Screw Spacing of 300 mm - Material Thickness of 0,60 mm

\*Values given in the tables are calculated by UMS with reference to AISI S100-2007 and Eurocode 3 Part 1.3.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 300 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.

## APPLICATION TYPES



### APPLICATION OF SUSPENDED CEILING WITH BRACKET

It is a ceiling system consisting of bracket, clip, Ceiling U, Ceiling C Profiles and plasterboards mounted on these profiles. Ceiling C Profiles are divided into two as main carrier profile and auxiliary carrier profile. Ceiling C profile which is mounted on brackets connected to the ceiling is called main carrier profile while Ceiling C profile which provides a surface for fastening plasterboards is called auxiliary carrier profile. Ceiling U profile is intended to provide guidance for main carrier Ceiling C profiles and form a framework for auxiliary carrier C profiles.

## APPLICATION

UMS has specified limit values to be taken into consideration for application of suspended ceiling with bracket in the table on the next page. Material analysis table given on the next page can be utilized for the quantity of materials to be consumed.



For proper application.

## LIMIT VALUES FOR SUSPENDED CEILING WITH BRACKET

DESCRIPTION	LIMIT VALUE
Profile Size:	27/60/27 mm (Main and Auxiliary Carrier Ceiling C Profile)
Main Carrier Profile Range:	must be maximum 1100 mm
Bracket Spacing:	must be maximum 900 mm
Auxiliary Carrier Profile Spacing:	must be maximum 500 mm
Screw Spacing:	must be maximum 300 mm
Distance of the First and Last Main Carrier Profile to the Parallel Wall:	must be maximum 150 mm
Distance of the First and Last Auxiliary Carrier Profile to the Parallel Wall:	must be maximum 100 mm
Distance of the First and Last Brackets to Perpendicular walls:	must be maximum 250 mm


\*UMS recommends 900 mm and lower measures for bracket axial spacings.

## MATERIAL ANALYSIS FOR SUSPENDED CEILING WITH BRACKET

DESCRIPTION	1 m² CONSUMPTION
Plasterboard:	1,05 m²
Ceiling C Profile:	3,6 m
Ceiling U Profile:	1,3 m
Bracket:	1,7 pcs
Bracket:	5,8 pcs
Extension Piece:	0,7 pcs
Joint Tape:	1,8 m
Drywall Screw:	16 pcs
Steel wall Plug:	1,7 pcs
Plastic wall Plug, Shim, Screw:	1 pcs
Jointing Plaster:	0,4 kg
Satin Finishing Plaster:	1 kg/ m²
Insulating Tape:	1,3 m
Insulating Material (Optional):	1,05 m³
Corner Profile (Corner Tape):	According to technical details of the ceiling


\*Consumptions may vary depending on project details.

Order of operations given below should be followed for a complete application.

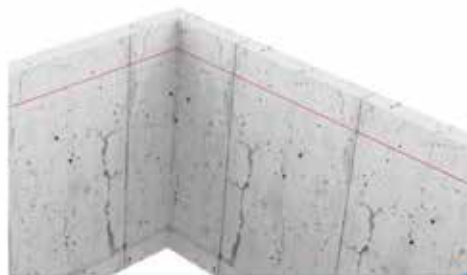


### STEP 1

Suspended ceiling elevation is determined using auxiliary equipment including laser, chalk line, water balance etc.

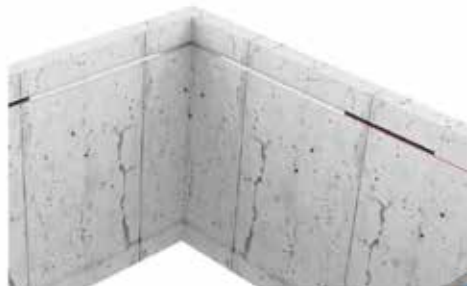


### STEP 2

Ceiling U profiles, in accordance with suspended ceiling elevation, are fixed onto the walls using outside wall plugs and screws, with a distance of 50 mm from both ends, with a spacing of 600 mm, as insulating tape applied to the parts that touch the wall.

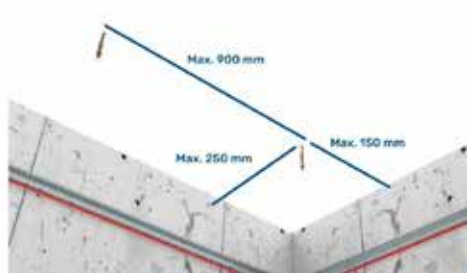

### STEP 3

Position of steel wall plugs is determined so that main carrier Ceiling C profile is maximum 150 mm to the parallel walls, maximum 250 mm to the perpendicular walls and spacing between each bracket is maximum 900 mm. Set steel wall plug positions are drilled and wall plugs are mounted.

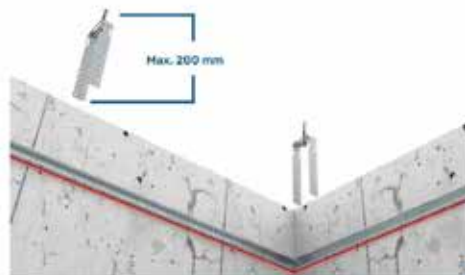


### STEP 4

Brackets are cut in accordance with the project so that they do not exceed 200 mm in length and mounting is completed by prying them into the existing wall plugs with nuts. If the length of bracket exceeds main carrier Ceiling C profile, exceeding part is folded and leveled with main carrier Ceiling C profile.



### STEP 5


Main carrier Ceiling C profiles are positioned so that they are placed on Ceiling U profiles and do not touch the wall, and they are screwed and fastened to brackets on both sides.

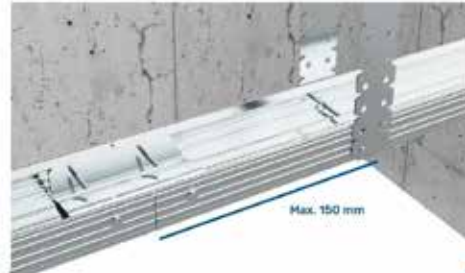

### STEP 6


In case the length of Main Carrier Ceiling C profile is shorter than application distance, two Ceiling C Profiles are attached using extension piece. Places of extension piece should be set so as to be maximum 150 mm to the bracket.

Order of operations given below should be followed for a complete application.

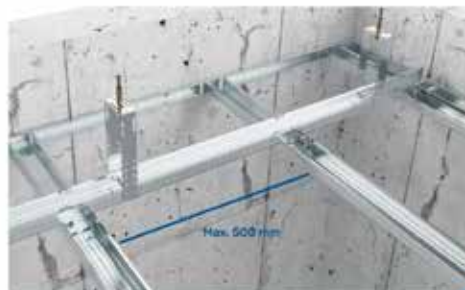

## STEP 7

Auxiliary Carrier Ceiling C Profiles are fastened to Main Carrier Ceiling C Profiles using clips, with a distance of maximum 500 mm to each other.

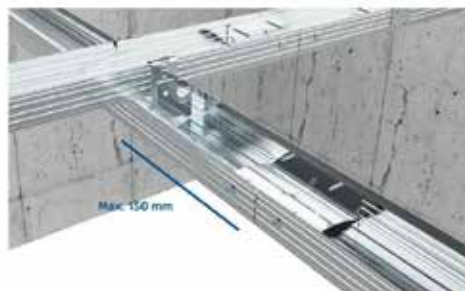

## STEP 8


For lengths where a single part cannot pass through at joining points of Auxiliary Carrier Ceiling C profiles, channel connectors are used. Channel connectors are fixed to both profiles from the sides that touch the profile with metal-metal screws and aligned zigzag in parallel profiles. Place of channel connectors should be maximum 150 mm from the clip.

Suspended ceiling system with bracket is completed




## STEP 9

Insulating materials are placed on profiles in accordance with the project.

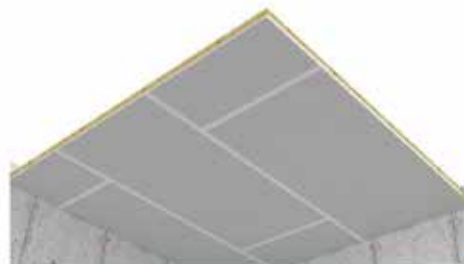

## STEP 10

Plaster boards are cut according to the project. Cut plaster boards are mounted onto Auxiliary Carrier Ceiling C profiles in a zigzag way with suitable screws and spaces between screws. Plaster board joints are covered using joint tapes of appropriate thickness and width according to the project.

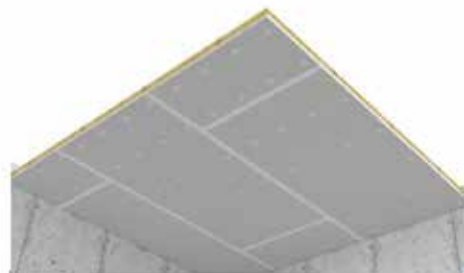

## STEP 11


Covered joints and screw heads are filled with suitable jointing plaster, after the filling plaster dries out, treatment area is sandpapered and leveled with the board.



## STEP 12

Satin plaster is applied, the surface is sandpapered.



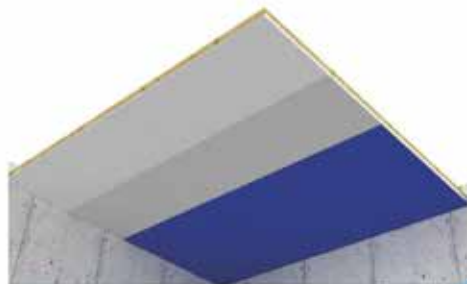

### STEP 13

After the plaster is set, surface of the plasterboard is finished by applying primer and paint. Application is completed.

## APPLICATION TYPES




### OMEGA PROFILE SUSPENDED CEILING APPLICATION

It is a ceiling system consisting of auxiliary components like hanger clip, suspension rod, clip, and Main Carrier Ceiling U. Auxiliary Carrier Omega Profiles and plasterboards mounted on these profiles. It is formed by fastening Auxiliary Carrier Omega Profiles with clips on two sides to Ceiling U profiles which are directly fastened to suspension rod and hanger clip. Auxiliary Carrier Omega Profiles form a surface for mounting plaster boards.

## APPLICATION

UMS has specified limit values to be taken into consideration for application of omega profile suspended ceiling in the table on the next page. Material analysis table given on the next page can be utilized for the quantity of materials to be consumed.

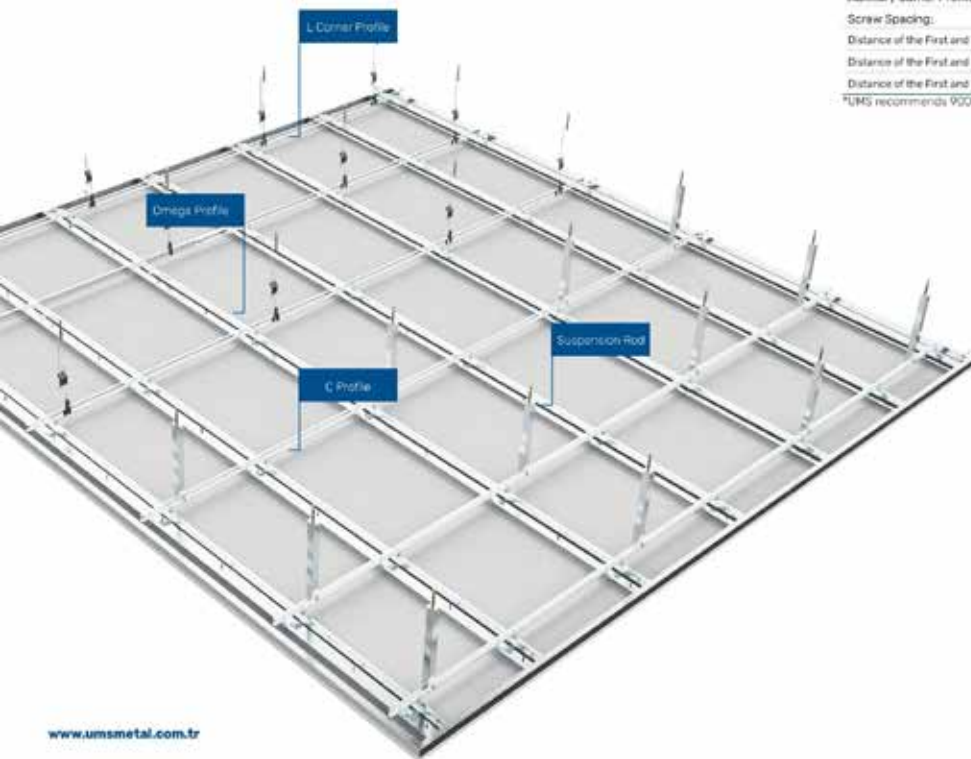

For proper application,

## LIMIT VALUES FOR OMEGA PROFILE SUSPENDED CEILING

DESCRIPTION	LIMIT VALUE
Profile Size:	22/16/22 mm - 22/15/22 mm (Auxiliary Carrier Ceiling Omega Profile)
Main Carrier Profile Range:	must be maximum 1200 mm
Bracket Spacing:	must be maximum 1100 mm
Auxiliary Carrier Profile Spacing:	must be maximum 500 mm
Screw Spacing:	must be maximum 300 mm
Distance of the First and Last Main Carrier Profile to the Parallel Wall:	must be maximum 150 mm
Distance of the First and Last Auxiliary Carrier Profile to the Parallel Wall:	must be maximum 100 mm
Distance of the First and Last Brackets to Perpendicular walls:	must be maximum 250 mm

\*UMS recommends 900 mm and below for suspension rod axial spacings.

## MATERIAL ANALYSIS FOR OMEGA PROFILE SUSPENDED CEILING

DESCRIPTION	1 m <sup>2</sup> CONSUMPTION
Plasterboard:	1,05 m <sup>2</sup>
Carrier U Profile:	2,2 m
Omega Profile:	2,4 m
Ceiling U Profile:	1,3 m
Hooked Wire Hanger*:	2,9 pcs
Suspension Rod*:	2,9 pcs
Suspension Clip*:	2,9 pcs
Double Spring*:	2,9 pcs
Joint Tape:	1,8 m
Drywall Screw:	16 pcs
Steel Wall Plug:	2,9 pcs
Plastic Wall Plug, Shim, Screw:	1 pcs
Jointing Plaster:	0,4 kg
Satin Finishing Plaster:	1 kg/ m <sup>2</sup>
Insulating Tape:	1,5 m
Insulating Material (Optional):	1,05 m <sup>3</sup>
Corner Profile (Corner Tape):	According to technical details of the ceiling

\*Consumptions may vary depending on project details.

Order of operations given below should be followed for a complete application.




## STEP 1

Suspended ceiling elevation is determined using auxiliary equipment including laser, chalk line, water balance etc.




## STEP 2

U profiles, in accordance with suspended ceiling elevation, are fixed onto the walls using suitable wall plugs and screws, with a distance of 50 mm from both ends, with a spacing of 600 mm, as insulating foam applied to the parts that touch the wall.

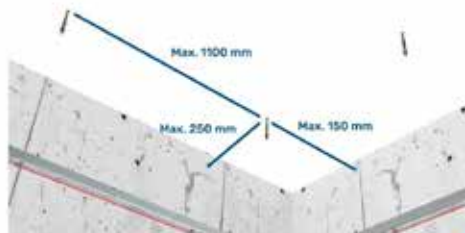

## STEP 3

Position of steel wall plugs is determined so that main carrier U profile is maximum 150 mm to the parallel walls, maximum 250 mm to the perpendicular walls and each suspension rod or L profile spacing is maximum 1500 mm. Set steel wall plug positions are drilled and wall plugs are mounted.

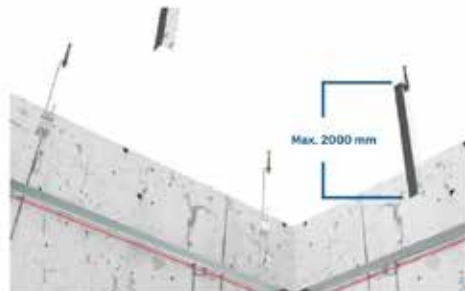


## STEP 4

Suspension rod or L profile is cut in accordance with the project so that they do not exceed 2000 mm in length and mounting is completed by pinning them into the existing wall plugs with nuts. When mounting L profile, L brackets attached to steel wall plug are used. L profiles are fastened to L brackets with metal-to-metal screws. In using suspension rod, carrier clips are fastened to suspension rod with double spring accessory. Height is adjusted by means of double spring in accordance with ceiling elevation.



## STEP 5


Main carrier Ceiling U profiles are positioned so as to be over the horizontal Ceiling U profiles that serve as a guide and not to touch the wall, and they are mounted in the following ways: If suspension rod is used, they are slipped on carrying clips, if L profile is used they are screwed to the U profile on two points. Main carrier Ceiling U profile spacings should be formed according to the load to be carried making use of the table at the end of the heading.

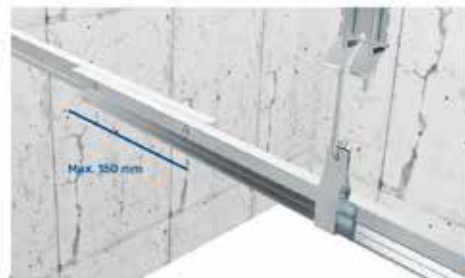

## STEP 6

At the joining points of main carrier U profiles, U profiles are aligned back-to-back and screwed so as to lap over each other at least 150 mm.

\*If the long side of plaster boards is PERPENDICULAR to auxiliary carrier TC profiles, auxiliary carrier aisle spacings should be maximum 500 mm. If the long side of plaster boards is PARALLEL to auxiliary carrier TC profiles, auxiliary carrier aisle spacings should be maximum 600 mm. Effect of auxiliary profile application with 400 mm and 500 mm spacings on main profile spacings based on system weight is shown in the table at the end of the heading.

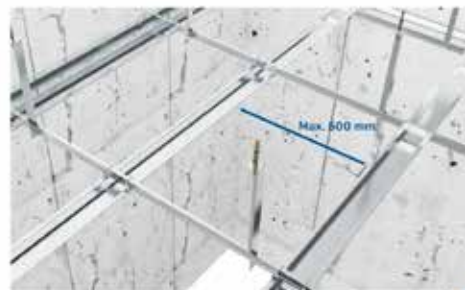

## STEP 7

Auxiliary Carrier Omega Profiles are fastened to Carrier U Profiles by means of fastening clip so that spacings between them do not exceed 600 mm.



## STEP 8

At the joining points of Auxiliary Carrier Omega Profiles, Auxiliary Carrier Omega Profiles are aligned so as to overlap at least 150 mm and screwed with metal-to-metal screw. Distance between joining points of Main Carrier Ceiling U profiles and Auxiliary Carrier Omega profiles should be minimum 1200 mm.

Omega profile suspended ceiling system is completed.



\*Finishing steps are written with reference to plaster board application. Order and content of steps may vary when different materials are used.

## STEP 9

Insulating materials are placed on profiles in accordance with the project.



## STEP 10

Plaster boards are cut according to the project. Cut plaster boards are mounted onto Auxiliary Carrier Omega profiles in a zigzag way, with suitable screws and screw spacings. Plaster board joints are covered using joint tapes of appropriate thickness and width according to the project.



## STEP 11


Covered joints and screw heads are filled with suitable jointing plaster, after the plaster dries, treated area is sandpapered and leveled with the board.



## STEP 12

Satin plaster is applied, the surface is sandpapered.



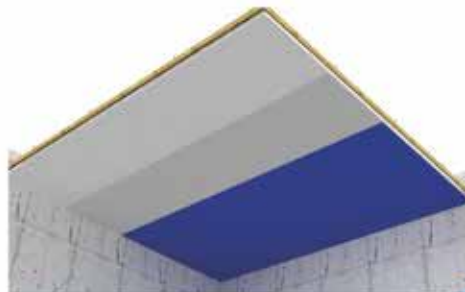

## STEP 13

After the plaster is set, surface of the plasterboard is finished by applying primer and paint. Application is completed.

## LOAD CARRYING TABLE FOR OMEGA PROFILE SUSPENDED CEILING

### MAXIMUM LOAD CARRYING TABLE ACCORDING TO 0,50 MM AUXILIARY CEILING C PROFILE

0,50 mm	Maximum Load Carrying (kg/m <sup>2</sup> )	
Main Profile Spacing (m)	For 400 mm Auxiliary Profile	For 500 mm Auxiliary Profile
600	≤ 55	≤ 55
900	≤ 35	≤ 35
1200	≤ 25	≤ 25

\*Values given in the tables are calculated by UMS with reference to AISI S100-2007 and Eurocode 3 Part 1.3.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 300 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.

## APPLICATION TYPES



### **SUSPENDED CEILING APPLICATION WITH CEILING C47 PROFILE**

This is a ceiling system consisting of auxiliary components like suspension rod, double spring, quartet clips, and Ceiling C47 profile, L corner profile or Ceiling U profile and plaster boards mounted on these profiles. It is formed by hanging Ceiling C47 profiles on quartet clips which are fastened to suspension rods by means of double spring.

## APPLICATION

UMS has specified limit values to be taken into consideration for application of Ceiling C47 profile suspended ceiling in the table on the next page. Material analysis table given on the next page can be utilized for the quantity of materials to be consumed.



For proper application.

## LIMIT VALUES FOR SUSPENDED CEILING WITH CEILING C47 PROFILE

DESCRIPTION	LIMIT VALUE
Profile Size:	18/47/18 mm (Ceiling C47 Profile)
Ceiling C47 Profile Spacing:	must be maximum 500 mm
Suspension Rod Spacing:	must be maximum 1100 mm
Screw Spacing:	must be maximum 300 mm
Distance of the First and Last C47 Profile to the Parallel Wall:	must be maximum 100 mm
Distance of the First and Last Suspension Rods to Perpendicular Walls:	must be maximum 250 mm

\*UMS recommends 900 mm and below for suspension rod axial spacings.

## MATERIAL ANALYSIS FOR SUSPENDED CEILING WITH CEILING C47 PROFILE

DESCRIPTION	1 m² CONSUMPTION
Plasterboard:	1,05 m²
Ceiling C 47 Profile:	2,4 m
Clamping L Profile:	1,3 m
Screwed Wire:	2,9 pcs
Suspension Rod:	2,9 pcs
Special Clip:	2,9 pcs
Double Spring:	2,9 pcs
Extension Piece:	0,7 pcs
Joint Tape:	1,8 m
Drywall Screw:	16 pcs
Steel Wall Plug:	2,9 pcs
Plastic Wall Plug, Shim, Screw:	1 pcs
Jointing Plaster:	0,4 kg
Satin Finishing Plaster:	1 kg/ m²
Insulating Tape:	1,3 m
Insulating Material (Optional):	1,05 m³
Corner Profile (Corner Tape):	According to technical details of the ceiling

\*Consumptions may vary depending on project details.

Order of operations given below should be followed for a complete application.




## STEP 1

Suspended ceiling elevation is determined using auxiliary equipment including laser, chalk line, water balance etc.




## STEP 2

L or U profiles, in accordance with suspended ceiling elevation, are fixed into the wall using suitable wall plugs and screws, with a distance of 50 mm from both ends, with a spacing of 600 mm, as insulating tape applied to the parts that touch the wall.

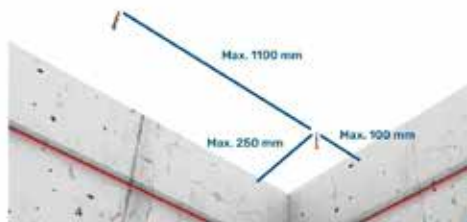

## STEP 3

Position of steel wall plugs is set so that Ceiling C47 profile is maximum 100 mm to the parallel walls, maximum 250 mm to the perpendicular walls and each suspension rod spacing is maximum 1100 mm. Set steel wall plug positions are drilled and wall plugs are mounted.

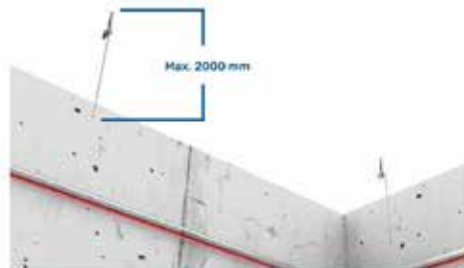

## STEP 4

Suspension rods are cut in accordance with the project so that they do not exceed 2000 mm in length and mounting is completed by pinning them into the existing wall plugs with nuts.



## STEP 5

Quarter clips are fastened to suspension rod with double spring accessory. Height is adjusted by means of double spring in accordance with ceiling elevation.



## STEP 6

Ceiling C47 profiles are positioned so as to be on horizontal Ceiling L or U profiles that serve as guide and they are mounted by hanging on quarter clips fastened to suspension rods. Ceiling C47 profile spacings should be formed based on the load to be carried using the table below.




C47 profile suspended ceiling system is completed.

\*Ceiling C47 spacings are with an 400 mm and 600 mm in the total span of the area of the ceiling, maximum load carrying capacity of the system according to main profile spacings based on application of suspension rods at various spacings according to profile thickness is specified.

## STEP 7

For lengths where a single part cannot pass through at joining points of Ceiling C47 profiles, channel connectors are used. Channel connectors are fixed to both profiles from the slots that touch the profile with drywall screws and aligned zigzag in parallel profiles.

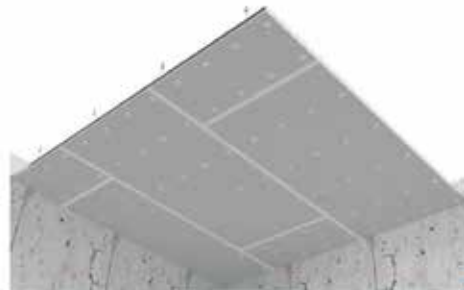

## STEP 10

Covered joints and screw heads are fixed with suitable jointing plaster, after the filling plaster dries, treated area is sandpapered and leveled with the board.



\*Following steps are written with reference to plaster board application, color and content of steps may vary when different materials are used.

## STEP 8

Insulating materials are placed on profiles in accordance with the project.




## STEP 11

Satin plaster is applied, the surface is sandpapered.



## STEP 9


Plaster boards are cut according to the project. Cut plaster boards are mounted onto Ceiling C47 profile in a zigzag way, with suitable screws and screw spacing. Plaster board joints are covered using joint tapes of appropriate thickness and width according to the project.

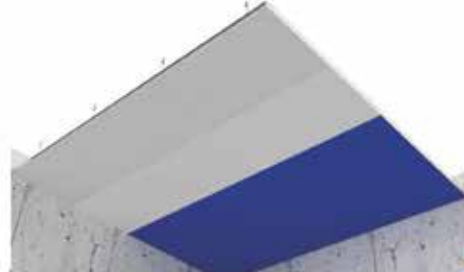

## STEP 12

After the plaster is set, surface of the plasterboard is finished by applying primer and paint. Application is completed.



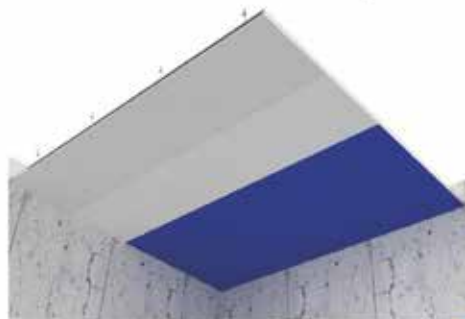

## STEP 13

After the plaster is set, surface of the plasterboard is finished by applying primer and paint. Application is completed.

### LOAD CARRYING TABLES FOR C47 PROFILE (FRENCH SYSTEM) SUSPENDED CEILING SYSTEM

#### MAXIMUM LOAD CARRYING TABLE WITH 0,50 MM CEILING C47 PROFILE

0,50 mm	Maximum Load Carrying (kg/m <sup>2</sup> )			
	Suspension Rod Spacing (mm)			
Main Profile Spacing (m)	1100	1000	900	800
400 mm	20	27	37	53
500 mm	16	21	30	42

\*Values given in the tables are calculated by UMS with reference to AISI 5100-2007 and Eurocode 3 Part 1.5.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 500 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.

#### MAXIMUM LOAD CARRYING TABLE WITH 0,60 MM CEILING C47 PROFILE

0,60 mm	Maximum Load Carrying (kg/m <sup>2</sup> )			
	Suspension Rod Spacing (mm)			
Main Profile Spacing (m)	1100	1000	900	800
400 mm	23	31	43	60
500 mm	18	25	34	49

\*Values given in the tables are calculated by UMS with reference to AISI 5100-2007 and Eurocode 3 Part 1.5.

\*Yield strength of the material is taken as 235 N/mm<sup>2</sup>, deflection limit is taken as L/360 in calculations.

\*All values given above are calculated with reference to UMS profiles.

\*Allowable stresses are also taken into account in drawing up the table.

\*All values are calculated on the basis of the fact that plaster boards are screwed to the profiles with a spacing of 300 mm.

\*UMS recommends 900 mm and below for suspension rod axial spacings.





## PARTITION WALL SYSTEMS

A frame system constructed from metal profile or timber lath in order to divide a space and ensure sound and heat insulation between divisions is called partition wall system. The system is made functional by coating with plasterboards or cement-based construction boards. Selection of profile may vary depending on the choice of system. UMG has all connection details and production diversity necessary for partition wall systems with U/A profiles produced for Wall LL, Wall C and reinforced door frames.

## PARTITION WALL SYSTEMS

### TYPES

Type of partition wall produced using wall U, Wall C profiles and plasterboards, or cement-based construction boards fastened to these profiles. Profiles up to 12 m are produced by UMS. DIN 4103-1 standard is followed in determining wall height. DIN 4103-1 standard divides application areas into 2 groups.

### FEATURES

- Resistant to dynamic effects thanks to its flexibility.
- Because the profiles used are lightweight and high-strength, it provides 9 times more flexibility compared to brick walls in case of an earthquake.
- Provides high level sound and heat insulation if suitable boards and insulating materials are used.
- Saves time and labor as it allows quick and easy mounting-demounting.
- Does not cause loss of space as sections of the system are narrow.
- Allows concealing installations.
- Does not produce bacteria.
- Economical.
- Load amount per m<sup>2</sup> is 75 times less compared to brick wall.
- Using with appropriate board type is possible where fire resistance is required.
- Allows jointless passage, in a single part, of openings up to 12 m through profiles.

### FIELDS OF USE

- Business and shopping centers
- Hospitals
- Industrial constructions
- Flourings
- Office and management buildings
- Restored and renovated buildings
- Hotels
- Performance centers (Theatres and cinema halls, conservatories etc.)

## PARTITION WALL SYSTEMS

### APPLICATION AREA 1

Walls in spaces where few people are present: houses, hotels, office and hospital buildings including their corridors, etc.

### APPLICATION AREA 2

Walls in spaces where many people are present: Described as meeting rooms, conference rooms, show-sale areas and spaces with flooring height differences more than 1 m.

Metal construction partition wall systems are preferred in constructing space limiting, non-load bearing walls, installation walls, security walls, fire walls and shaft walls. Necessary partition wall systems to be preferred according to the wall type are as follows.

#### Space limiting, non-load bearing walls

- Single stud construction + Single layer board
- Single stud construction + Double layer board
- Single stud construction + Three-layer board
- Double stud construction + Double layer board

#### Installation wall

- Double stud construction + Double layer board

#### Security Wall

- Single stud construction + Three-layer board + Steel

#### Fire Wall

- Single stud construction + Single layer board
- Single stud construction + Double-layer board + Steel board
- Single stud construction + Three-layer board + Steel board

#### Shaft Wall

- Free tensioned construction (without sub-construction) + Double layer board
- Metal tie beam construction + Double layer board
- Double stud construction + Double layer board
- Combined metal double stud construction + double layer board

#### Timber construction partition wall

Type of partition wall constructed from timber lath, and plasterboards or cement-based construction boards fastened to these timber laths. DIN 4103-1 standard divided into two application areas is followed also for determining height of partition wall system constructed from timber boards.

Timber construction partition wall systems are preferred for constructing space limiting, non-load bearing walls. Necessary partition wall systems to be preferred according to the wall type are as follows.

#### Space limiting, non-load bearing walls

- Single stud construction + Single layer board
- Single stud construction + Double layer board
- Double stud construction + Double layer board







## SINGLE LAYER

Details of partition wall constructed from single stud construction and single layer board



## THREE-LAYER

Details of partition wall constructed from single stud construction and three-layer board



## DOUBLE-LAYER

Details of partition wall constructed from single stud construction and double layer board



## DOUBLE STUD

Details of partition wall constructed from double stud construction and single layer board



## APPLICATION

Material analysis given on the next page can be utilized for the quantity of materials to be consumed. UMS has specified limit values to be taken into consideration for partition wall application in the table on the next page.



## LIMIT VALUE TABLE FOR PARTITION WALL

DESCRIPTION	LIMIT VALUE
Wall C Profile Spacing:	must be maximum 600 mm
Plaster Board Screw Spacing:	must be maximum 300 mm
Distance of Wall U Profile Starting and Ending Connections to the Walls:	must be maximum 50 mm
Wall U Profile Wall Plug Spacing:	must be maximum 600 mm

## PARTITION WALL SYSTEM ANALYSIS TABLE

Type of Material	SINGLE STUD-SINGLE LAYER COATING		SINGLE STUD-DOUBLE LAYER COATING		SINGLE STUD-THREE LAYER COATING	
	SINGLE C	DOUBLE C	SINGLE C	DOUBLE C	SINGLE C	DOUBLE C
Plasterboard:	2.00 m <sup>2</sup>		4.00 m <sup>2</sup>		6.00 m <sup>2</sup>	
Wall C Profile:	2.00 m <sup>2</sup>	3.60 m <sup>2</sup>	2.00 m <sup>2</sup>	3.60 m <sup>2</sup>	2.00 m <sup>2</sup>	3.60 m <sup>2</sup>
Wall U Profile:	0.60 m					
Perforated Corner Profile:	Ceiling Height x Number of Corners					
Joint Tape:	2.80 m					
Joint Plaster:	0.60 kg					
Drywall Screw (25 mm):	30 pcs	30 pcs	30 pcs	30 pcs	30 pcs	30 pcs
Drywall Screw (35 mm):	-	-	30 pcs	30 pcs	30 pcs	30 pcs
Drywall Screw (45 mm):	-	-	-	-	30 pcs	30 pcs
Wall plug-Shim-Screw:	2.20					
Insulation Material:	1.00 m <sup>2</sup>					

\*Consumptions may vary depending on project details.

## COMPONENTS OF THE SYSTEM



**Wall U Profile**

Type of non-load bearing wall profile that is needed to take Wall C profiles into the guide in a metal construction installed in constructing partition wall and to form a frame.



**Wall C Profile**

Type of load-bearing profile that forms partition wall frame as being used vertically. Can be produced up to 12 m.



**Wall UA Profile**

Profile type used to produce reinforced cornerframes.



**UA Bracket**

A type of bracket used to fix UA profiles, which are utilized to produce reinforced door frames, to ceiling and floor.



**Steel Wall Plug**

A fitting used in the mounting of wall U profiles on the floor.



**Wall plug-Screw**

A fastener used to wall-mount Ceiling U profiles.



**Drywall Screw**

A fastener used to mount plaster boards to wall U and wall C profiles.



**Perforated Corner Profile**

A type of profile used for plaster board corners.



**Sound Insulation Tape**

Insulation tape applied to the face of Ceiling U Profiles that touches the wall in order to provide sound insulation for vibrations caused by construction.



**Plasterboard**

Multi-purpose construction board, coated with cardboard on both faces, with plaster in the center. There are 4 different types of plasterboard which are standard, water resistant, fire resistant and water and fire resistant plasterboards. Due to high air permeability provides significant contribution in balancing ambient humidity, and in reducing sound and heat insulation when used with proper insulation material.



**Joint Tape**

A type of netting used to equally block joints remaining between plasterboards using joint resistant and to prevent cleavage at the joint points.



**Insulation Material**

Mineral wool of different density and thickness, valves used to increase heat insulation, sound insulation and resistance to fire.



Order of operations given below should be followed for a complete application.



## STEP 1

Location of Wall U profiles to be applied to the floor and ceiling is determined using auxiliary equipment including laser, chalk line, water balance etc.



## STEP 2

Wall U profiles, as sound insulation tape applied to the side that faces ceiling and floor, are fixed to the ceiling and floor with a distance of 50 mm from both ends and with a spacing of 600 mm, using suitable type of wall plug.



## STEP 3

Wall C profiles to be used vertically are cut 10 mm shorter than ceiling height.



## STEP 4

Parts of the Wall C profiles to form partition wall frame that touch the wall are affixed sound insulation tape and Wall C profiles on the edges are made ready for application. Wall C profiles that are affixed sound insulation tape so that surfaces with insulation tape face the side touching the wall, are turned and placed in Wall U profiles and partition wall frame is formed.



## STEP 5

Wall C profile sizes, thicknesses, axial spacings and number of plaster board coatings are determined using height calculation tables given at the end of the chapter. Wall C profiles with profile openings in the same direction so that they face application direction of the board, are placed in between Wall U profiles according to determined axial spacings. (In wet area single layer plasterboard applications, Wall C profile axial spacings should not exceed 400 mm for ceramic, marble coating etc.)



## STEP 6

In case double Wall C profile is used, back-to-back Wall C profiles should be screwed to each other with metal-to-metal screw with a maximum spacing of 750 mm.



## STEP 7

Following completion of construction, plaster boards are mounted on one side in a zigzag course.



## STEP 8

Installation pipes and wires are passed through the construction, which is coated on one side, using the holes on the profile in accordance with the project, and insulation materials, if any, are stuffed and placed between wall C profiles.

\*Following steps are written with reference to plaster board application. Order and content of steps may vary when different materials are used.



## STEP 9

Plasterboards are mounted on wall C profiles by means of drywall screws utilizing the tables below so that short sides face floor and ceiling. Prior to mounting, plaster boards should be cut 10-15 mm shorter than ceiling height in order to prevent moisture and contact with ceiling.

### VERTICAL SCREW SPACINGS ACCORDING TO PLASTERBOARD LAYER

Plasterboard	Vertical Screw Spacing (mm)		
	First Layer	Second Layer	Third Layer
In single layer applications	≤ 800	—	—
In double layer applications	≤ 750	≤ 800	—
In three-layer applications	≤ 700	≤ 800	≤ 800

### SCREW LENGTHS ACCORDING TO PLASTERBOARD LAYER

Plasterboard	Screw Lengths (mm)		
	First Layer	Second Layer	Third Layer
12.5	25	—	—
15	25	—	—
18-20	35	—	—
2x12.5	25	35	—
15+12.5	25	45	—
2x15	25	45	—
18+15	35	45	—
3x12.5	25	35	55



## STEP 10

Attention should be paid not to tear surface coatings of plaster boards. Joining points should centre wall C profiles without any gaps, at least 10 mm should be left from the board edges when screwing.

Order of operations given below should be followed for a complete application.



## STEP 11

Length of the screws should exceed at least 10 mm the side of the plasterboard that touches the profile. When selecting screws, sharp point screws should be preferred up to 0.70 mm profile thickness and self-drilling screws up to 0.70-2.25 mm profile thickness.




## STEP 12

Countersunk heads of screws should be sunk into the surface as much as the board coating thickness. If mistakenly screwed deeper, the screws in question should be unscrewed and screwed again as described with a 50-60 mm distance to screw hole.



## STEP 13

Joining points of plaster boards on the horizontal axis should be staggered. In single layer plasterboard applications, joint spacings on one side should be staggered at least 400 mm while in double layer applications horizontal joints should be staggered 250 mm on the vertical. Vertical joints should be staggered as much as Wall C profile axial spacing. For battling joints on corresponding sides, if one surface starts with a full board the other surface should be applied with a half board.




## STEP 14

After completion of board mounting, joining points are covered with joint tape.



## STEP 15

Screw heads that jut out on the plasterboard surface are checked, screwed with a screwdriver to be leveled with the surface and all screw heads, joint cavities are covered with joint plaster.



## STEP 16

Drying of joint plaster is waited. After drying, it is leveled with the surface using sandpaper. The surface is dusted and then one coat of primer and two coats of paint are applied and the work is finished.



# HeeDGROUP



**MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 50 PROFILE AND TWO-COATS OF PLASTERBOARD**

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
35/49/35	0.40	3.77	4.27	3.84	4.35	12.50x2 + 12.50x2	100
	0.45	3.92	4.35	4.00	4.35		
	0.50	4.08	4.35	4.18	4.35		
	0.60	4.35	4.35	4.35	4.35		
	0.70	4.35	4.35	4.35	4.35		
	0.80	4.35	4.35	4.35	4.35		
42/49/42	0.40	-	-	-	-		
	0.45	3.81	4.35	3.89	4.35		
	0.50	3.94	4.35	4.04	4.35		
	0.60	4.23	4.35	4.35	4.35		
	0.70	4.42	4.35	4.42	4.35		
	0.80	4.42	4.35	4.42	4.35		
47/49/47	0.40	-	-	-	-		
	0.45	-	-	-	-		
	0.50	3.87	4.35	3.97	4.35		
	0.60	4.13	4.35	4.26	4.35		
	0.70	4.42	4.35	4.26	4.35		
	0.80	4.42	4.35	4.26	4.35		

**MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 75 PROFILE AND TWO-COATS OF PLASTERBOARD**

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
35/74/35	0.40	4.39	4.84	4.47	5.00	12.50x2 + 12.50x2	125
	0.45	4.54	5.04	4.65	5.23		
	0.50	4.71	5.26	4.82	5.48		
	0.60	5.06	5.72	5.21	6.00		
	0.70	5.45	6.21	5.64	6.21		
	0.80	5.88	6.21	6.31	6.21		
42/74/42	0.40	-	-	-	-		
	0.45	4.50	5.03	4.60	5.24		
	0.50	4.64	5.23	4.77	5.47		
	0.60	4.95	5.65	5.31	5.94		
	0.70	5.29	6.10	5.48	6.40		
	0.80	5.65	6.40	5.89	6.40		
47/74/47	0.40	-	-	-	-		
	0.45	-	-	-	-		
	0.50	4.60	5.21	4.73	5.45		
	0.60	4.89	5.61	5.05	5.91		
	0.70	5.20	6.03	5.40	6.39		
	0.80	5.53	6.47	5.77	6.47		

\*All values given above are calculated with reference to UMS profiles.

**MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 100 PROFILE AND TWO-COATS OF PLASTERBOARD**

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
35/99/35	0.40	4.82	5.23	4.93	5.42	12.50x2 + 12.50x2	150
	0.45	4.98	5.44	5.10	5.66		
	0.50	5.14	5.64	5.28	5.89		
	0.60	5.48	6.09	5.66	6.41		
	0.70	5.87	6.59	6.08	6.98		
	0.80	6.30	7.14	6.56	7.61		
42/99/42	0.40	-	-	-	-		
	0.45	5.01	5.52	5.14	5.76		
	0.50	5.17	5.73	5.32	6.00		
	0.60	5.48	6.15	5.67	6.48		
	0.70	5.82	6.60	6.05	7.01		
	0.80	6.19	7.09	6.49	7.57		
47/99/47	0.40	-	-	-	-		
	0.45	-	-	-	-		
	0.50	5.17	5.76	5.32	6.04		
	0.60	5.47	6.34	5.66	6.52		
	0.70	5.79	6.61	6.02	7.02		
	0.80	6.15	7.07	6.41	7.56		

**MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 125 PROFILE AND TWO-COATS OF PLASTERBOARD**

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
49/124/49	0.40	-	-	-	-	12.50x2 + 12.50x2	175
	0.45	-	-	-	-		
	0.50	-	-	-	-		
	0.60	5.94	6.64	6.15	7.03		
	0.70	6.26	7.08	6.52	7.54		
	0.80	6.59	7.54	6.90	8.07		

**MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 150 PROFILE AND TWO-COATS OF PLASTERBOARD**

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		DOUBLE C	SINGLE C	DOUBLE C	CFT C		
49/149/49	0.60	-	-	-	-	12.50 + 12.50x2	200
	0.45	-	-	-	-		
	0.50	-	-	-	-		
	0.60	-	-	-	-		
	0.70	6.64	7.45	6.95	7.94		
	0.80	6.97	7.90	7.31	8.46		

\*All values given above are calculated with reference to UMS profiles.

# MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 50 PROFILE AND THREE-COATS OF PLASTERBOARD

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
35/49/35	0.40	5.98	4.35	4.03	4.35	12.50x3 + 12.50x3	125
	0.45	4.13	4.35	4.19	4.35		
	0.50	4.29	4.35	4.55	4.35		
	0.60	4.35	4.35	4.35	4.35		
	0.70	4.35	4.35	4.35	4.35		
	0.80	4.35	4.35	4.35	4.35		
42/49/42	0.40	-	-	-	-		
	0.45	4.02	4.35	4.09	4.35		
	0.50	4.16	4.35	4.23	4.35		
	0.60	4.42	4.35	4.42	4.35		
	0.70	4.42	4.35	4.42	4.35		
	0.80	4.42	4.35	4.42	4.35		
47/49/47	0.40	-	-	-	-		
	0.45	-	-	-	-		
	0.50	4.08	4.35	4.16	4.35		
	0.60	4.34	4.35	4.42	4.35		
	0.70	4.42	4.35	4.42	4.35		
	0.80	4.42	4.35	4.42	4.35		

# MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 75 PROFILE AND THREE-COATS OF PLASTERBOARD

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
35/74/35	0.40	4.61	5.08	4.67	5.21	12.50x3 + 12.50x3	150
	0.45	4.75	5.27	4.83	5.42		
	0.50	4.91	5.47	4.99	5.64		
	0.60	5.25	5.92	5.37	6.14		
	0.70	5.66	6.21	5.80	6.21		
	0.80	6.10	6.21	6.25	6.21		
42/74/42	0.40	-	-	-	-		
	0.45	4.74	5.31	4.82	5.47		
	0.50	4.88	5.49	4.97	5.65		
	0.60	5.17	5.89	5.29	6.12		
	0.70	5.50	6.32	5.65	6.40		
	0.80	5.87	6.40	6.05	6.40		
47/74/47	0.40	-	-	-	-		
	0.45	-	-	-	-		
	0.50	4.85	5.60	4.95	5.69		
	0.60	5.12	5.67	5.25	6.11		
	0.70	5.42	6.27	5.57	6.47		
	0.80	5.75	6.47	5.94	6.47		

\*All values given above are calculated with reference to UMS profiles.

# MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 100 PROFILE AND THREE-COATS OF PLASTERBOARD

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
35/99/35	0.40	5.02	5.41	5.10	5.56	12.50x3 + 12.50x3	175
	0.45	5.16	5.59	5.25	5.76		
	0.50	5.31	5.78	5.41	5.97		
	0.60	5.63	6.20	5.76	6.45		
	0.70	6.00	6.68	6.17	6.99		
	0.80	6.43	7.21	6.64	7.59		
42/99/42	0.40	-	-	-	-		
	0.45	5.25	5.75	5.35	5.94		
	0.50	5.39	5.93	5.50	6.14		
	0.60	5.67	6.31	5.81	6.58		
	0.70	5.99	6.74	6.17	7.06		
	0.80	6.36	7.21	6.56	7.60		
47/99/47	0.40	-	-	-	-		
	0.45	-	-	-	-		
	0.50	5.42	6.01	5.53	6.23		
	0.60	5.69	6.37	5.83	6.65		
	0.70	5.98	6.77	6.16	7.11		
	0.80	6.31	7.21	6.52	7.61		

# MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 125 PROFILE AND THREE-COATS OF PLASTERBOARD

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
49/124/49	0.40	-	-	-	-	12,50x2 + 12,50x2	200
	0.45	-	-	-	-		
	0.50	-	-	-	-		
	0.60	6.14	6.80	6.33	7.10		
	0.70	6.42	7.18	6.63	7.54		
	0.80	6.73	7.59	6.97	8.03		

# MAXIMUM HEIGHT CALCULATION TABLE WITH SINGLE STUD WALL C 150 PROFILE AND THREE-COATS OF PLASTERBOARD

Sizes	Material Thickness (mm)	Maximum Wall Height (m)				Plasterboard Thickness (mm)	Partition Wall Thickness (mm)
		Axial Spacing (60 cm)		Axial Spacing (40 cm)			
		SINGLE C	DOUBLE C	SINGLE C	DOUBLE C		
49/149/49	0.40	-	-	-	-	12.50x2 + 12.50x2	200
	0.45	-	-	-	-		
	0.50	-	-	-	-		
	0.60	-	-	-	-		
	0.70	6.76	7.47	6.98	7.86		
	0.80	7.06	7.87	7.32	8.35		

\*All values given above are calculated with reference to UMS profiles.

**CONSTRUCTING DOOR AND WINDOW FRAMES WITH WALL U AND WALL C PROFILES**

**STEP 1**

For mounting door and window frames, Wall U and Wall C profiles are interlocked and screwed to each other at the flank surfaces. Wall U - Wall C profiles which are made into box profile and gained characteristics of a carrier profile for door and window, are placed into bottom and ceiling Wall U profiles and attached by means of drywall screw or plaster clamp.


**STEP 2**

For horizontal planes where window or door frame fit into, Wall U profiles form cuts in the flanks and are bent 90° with a distance of at least 200 mm from both sides. Bended parts are leveled and screwed to the studs, which have been made into box profile on the edges, with metal-to-metal screw and Intel is mounted.


**STEP 3**

For door and window openings, Wall C profile of suitable size is placed, with a spacing of at least 150 mm from Wall U - Wall C box profile, into the places that stay under and over the Intel. Axial spacing of Wall C profiles placed should not exceed 400 mm.


**STEP 4**

Attention should be paid to place the plasterboards in a way that they do not coincide with the Intel and Wall U - Wall C box profiles on the sides of the frame and that the joining points are mounted by staggering.

**PRODUCING DOOR AND WINDOW FRAMES WITH WALL UA PROFILES**

**STEP 1**

UA profiles of 2 mm thickness specially produced by UMS for mounting door and window frames are placed in bottom and ceiling Wall U profiles and mounted on brackets produced exclusively for UA profiles using nut, bolt, wall plug and screw. Wall UA profiles have slot holes for easy fixing to brackets with nuts-bolts. Wall UA 50 profiles have slot holes in a single line while Wall UA 75 and 100 profiles have slot holes in double line.


**STEP 2**

For horizontal planes where window or door frame fit into, Wall U profiles form cuts in the flanks and are bent 90° with a distance of at least 200 mm from both sides. Bended parts are leveled and screwed with metal-to-metal screw to Wall UA profiles that are lined up back-to-back and serve as carrier on the edges and Intel is mounted.



**STEP 3**

For door and window openings, Wall C profile of suitable size is placed, with a spacing of at least 150 mm from Wall UA profile, into the places that stay under and over the Intel. Axial spacing of Wall C profiles placed should not exceed 400 mm.


**STEP 4**

Attention should be paid to place the plasterboards in a way that they do not coincide with the Intel and Wall UA profiles on the sides of the frame and that the joining points are mounted by staggering.



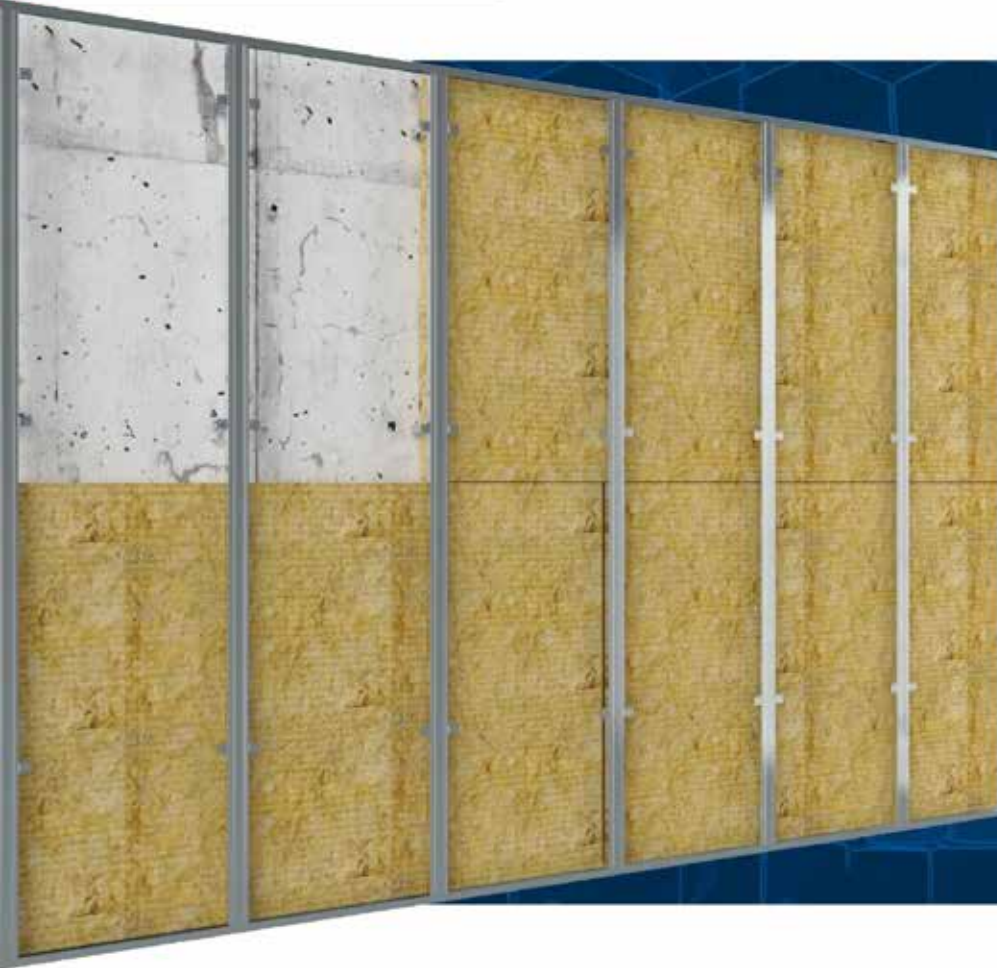

## **WALL CLADDING SYSTEMS**

A wall cladding system made by using Ceiling C, Ceiling U and brackets in order to level wall surface, form a planar surface and/or gain an aesthetic appearance.



## WALL CLADDING SYSTEMS



### TYPES

#### WALL CLADDING SYSTEM DEPENDENT ON EXISTING WALL

This is a wall cladding system created by mounting carrier metal profiles on brick, pumice, gas concrete, wood, concrete, reinforced concrete, etc. present in the construction and by applying plasterboards on these profiles.

#### WALL CLADDING SYSTEM INDEPENDENT OF EXISTING WALL

This is a wall cladding system created by applying plasterboards on the frame formed by carrier metal profiles independent of existing wall in the construction.

### FEATURES

- Resistant to dynamic effects thanks to its flexibility.
- Provides formation of a planar surface, with a leveled and smooth wall.
- Provides high level sound and heat insulation if suitable boards and insulating materials are used.
- Saves time and labor as it allows quick and easy mounting-demounting.
- Does not cause loss of space as sections of the system are narrow.
- Allows concealing installations.
- Does not produce bacteria.
- Economical.
- Aesthetical.
- Using with appropriate board type is possible where fire resistance is required.

### FIELDS OF USE

- Business and shopping centers
- Hospitals
- Industrial constructions
- Spaces that require sound and heat insulation
- Housing
- Office and management buildings
- Restored and renovated buildings
- Hotels
- Performance centers (Theatres and cinema halls, conservatories etc.)
- Recording studios

## COMPONENTS OF THE SYSTEM



**Wall U Profile**

Type of non-load bearing wall profile that is needed to take Wall C profiles into the guide in a metal construction, installed in constructing partition wall and to form a frame.



**Ceiling U Profile**

It is a non-load bearing ceiling profile needed for alignment of ceiling. Ceiling C profiles in the metal construction built to make suspended ceiling and for leveling of the system.



**Ceiling C Profile**

Divided into two as main center profile and auxiliary center profile. Main center Ceiling C profile is the term used for Ceiling C profile hung on hanger clip and placed in the center part of the system. Auxiliary Ceiling C Profile is the term used for Ceiling C Profile that is fastened to the main center Ceiling C profile by the help of clip and on which plasterboards are mounted.



**Wall C Profile**

Type of center profile that forms the dead wall frame by being used on the vertical in wall cladding system independent on existing wall. Can be produced up to 12 m.



**Bracket**

A fastener used for mounting Ceiling C profiles on the wall and adjusting variations from the bump line on the wall.



**Sound Insulation Tape**

Insulation tape used between the wall and wall U Profile in order to ensure sound insulation for vibrations caused by the construction.



**Wall plug-Screw**

A fastener used to mount Ceiling U profiles and brackets.



**Drywall Screw**

A fastener used to mount plaster boards to wall U and wall C profiles.



**Plasterboard**

Multi-purpose construction boards, coated with cardboard on both faces, with plaster in the center. There are 4 different types of plasterboard which are standard, water resistant, fire-resistant and water and fire resistant plasterboards. Due to high air permeability plasterboard conducts air balancing, prevents fungus, and in ensuring sound and heat insulation when used with proper insulation material.



**Joint Tape**

A type of taping used to equally break joints remaining between plasterboards using joint resistant and to prevent cleavage at the joint points.




**Steel Wall Plug**

A fitting used in the mounting of ceiling U profiles on the floor.



**Insulation Material**

Mineral wool of different density and thickness values used to increase heat insulation, sound insulation and resistance to fire.

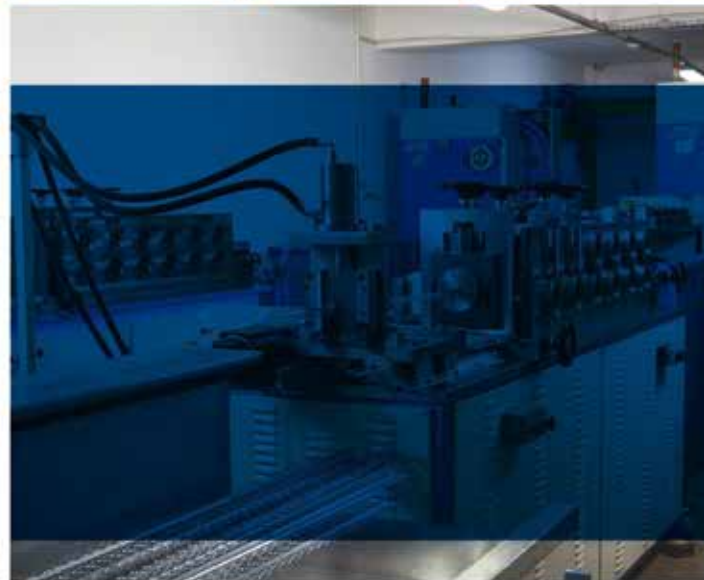

## APPLICATION TYPES



### APPLICATION OF WALL CLADDING DEPENDENT ON EXISTING WALL

This is a wall cladding system consisting of track, Ceiling U, Ceiling C Profiles and plasterboards mounted on these profiles. Brackets are used to adjust carrying and variations from the plumb line, Ceiling U profiles are used to form a frame, Ceiling C profiles are used to ensure plasterboard connections and vertical points of support.

## APPLICATION

Material consumptions given in analysis table can be utilized for the quantity of materials to be consumed. UMS has specified limit values to be taken into consideration for application of wall cladding dependent on existing wall in the table on the next page.

For a proper and complete application of wall cladding system dependent on existing wall, order of operations on the next page should be followed.



For proper application,

## LIMIT VALUES FOR WALL CLADDING DEPENDENT ON EXISTING WALL

DESCRIPTION	LIMIT VALUE
Bracket Spacing:	must be maximum 600 mm horizontally maximum 1500 mm vertically
Ceiling C Profile Spacing	must be maximum 600 mm
Plasterboard Screw Spacing	must be maximum 300 mm
Distance of Ceiling U Profile Starting and Ending Wall Plug Connections to Walls:	must be maximum 50 mm
Ceiling U Profile Wall Plug Spacing:	must be maximum 600 mm

## SYSTEM ANALYSIS FOR WALL CLADDING SYSTEM DEPENDENT ON EXISTING WALL

Type of Material	Single Coat Plasterboard (Axial Spacing mm)		Double Coat Plasterboard (Axial Spacing mm)	
Plasterboard:	600	400	600	400
Wall U Profile:			7,56 m	
Wall C Profile:	18,90 m	27,00 m	18,90 m	27,00 m
Sound Insulation Taper:			11,70 m	
Wall plug-Screw:			23 pcs	
Bracket:			15 pcs	
Bracket Screw:			30 pcs	
Drywall Screw 25:	117 pcs	153 pcs	81 pcs	99 pcs
Drywall Screw 28:	-	-	117 pcs	153 pcs
Joint Tape:			14,40 m	
Perforated Corner Profile:	varies depending on (floor height) x (number of corners)			

\* 5% wastage is taken into account for a 1m<sup>2</sup> of WALL CLADDING at 3,50 m height. Quantities may vary depending on the project details.

\* Consumptions may vary depending on project details.



Order of operations given below should be followed for a complete application.

## STEP 1

Location of Ceiling U profiles to be applied to the floor and ceiling is determined using auxiliary equipment including laser, chalk line, water balance etc.

## STEP 2

Ceiling U profiles, as sound insulation tape applied to the side that faces ceiling and floor, are fixed to the ceiling and floor with a distance of 50 mm from both ends and with a spacing of 600 mm, using suitable type of wall plug.

## STEP 3

Wall C profiles to be used vertically are cut 10 mm shorter than ceiling height.

## STEP 4

Brackets required for fastening of Ceiling U profiles are mounted on the wall surface using wall plugs-screws, with a spacing of maximum 600 mm horizontally and maximum 1500 mm vertically.


## STEP 5

Ceiling U profiles are leveled into brackets and placed in Ceiling U profile on the floor and fixed using metal-to-metal screws. In cases where it is not possible to use Ceiling U in the ceiling, the lost bracket should be mounted by leaving a maximum distance of 50 mm from the ceiling.

## STEP 6

Wings that jut out following Ceiling C profiles are screwed to brackets are bent sideways or cut using suitable scissors.





## STEP 7

After Ceiling C profiles are mounted, insulation materials, if any in the project, are mounted and installation is applied.

Wall cladding dependent on existing wall system is completed.




## STEP 8

Plasterboards are cut in accordance with the project and 10 mm shorter than ceiling height. Cut plaster boards are mounted onto Ceiling C profiles as staggered, leaving a 10-mm margin from the floor, with suitable screws and screw spacings.



## STEP 9

Wall C profiles to be used vertically are cut 10 mm shorter than ceiling height.




## STEP 10

Plaster board joints are covered using joint tapes of appropriate thickness and width according to the project. Covered joints and screw heads are filled with suitable jointing plaster; after the filling plaster dries, treated area is sandedpapered and leveled with the board.



## STEP 11


Satin plaster is applied, the surface is sandedpapered.



## STEP 12

Application is completed by applying primer and paint.

## APPLICATION TYPES

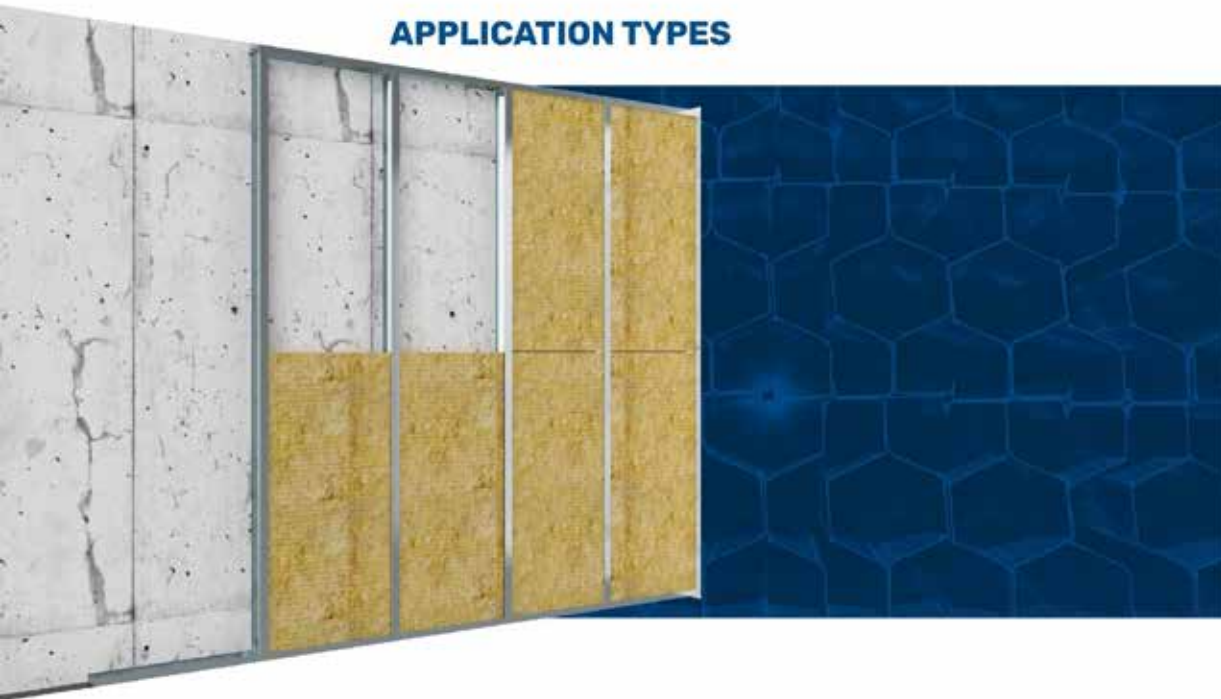

### APPLICATION OF WALL CLADDING INDEPENDENT OF EXISTING WALL

This is a wall cladding system independent of existing wall, consisting of Wall U and Wall C Profiles and plasterboards mounted on these profiles. Wall U profile is used to form a frame and provide guidance while Wall C profiles are used to provide plasterboard connections and form vertical support points.

## APPLICATION

Material consumptions given in analysis table can be utilized for the quantity of materials to be consumed. UMS has specified limit values to be taken into consideration for application of wall cladding dependent on existing wall in the table on the next page.

For a proper and complete application of wall cladding system dependent on existing wall, order of operations on the next page should be followed.



For proper application,

## LIMIT VALUES FOR WALL CLADDING INDEPENDENT OF EXISTING WALL

DESCRIPTION	LIMIT VALUE
Wall C Profile	must be maximum 600 mm
Plaster Board Screw Spacing	must be maximum 300 mm
Wall U Profile wall Plug Spacing	must be maximum 600 mm
Distance of Wall U Profile Starting and Ending Wall Plug Connections to the Walls	must be maximum 50 mm

## SYSTEM ANALYSIS FOR WALL CLADDING INDEPENDENT OF EXISTING WALL

Type of Material	Single Coat Plasterboard (Axial Spacing mm)		Double Coat Plasterboard (Axial Spacing mm)	
Plasterboard:	600	400	600	400
Wall U Profile:			7.56 m	
Wall C Profile:	18.90 m	27.00 m	18.90 m	27.00 m
Sound Insulation Tape:			11.70 m	
Wall plug-Screw:			23 pcs	
Drywall Screw 25:	117 pcs	153 pcs	81 pcs	99 pcs
Drywall Screw 28:	-	-	157 pcs	153 pcs
Joint Tape:			14.40 m	
Perforated Corner Profile:	varies depending on (floor height) x (number of corners)			

\* 5 % wastage is taken into account for a 9m of WALL CLADDING at 2.00 m Height. Quantities may vary depending on the project details.

\* Consumptions may vary depending on project details.

Order of operations given below should be followed for a complete application.

## STEP 1

Location of Wall U profiles to be applied to the floor and ceiling is determined using auxiliary equipment including laser, chalk line, water balance etc.

## STEP 2

Wall U profiles, as sound insulation type applied to the side that faces ceiling and floor, are fixed to the ceiling and floor with a distance of 50 mm from both ends and with a spacing of 600 mm, using suitable type of wall plug.

## STEP 3

Wall C profiles to be used vertically are cut 10 mm shorter than ceiling height.

## STEP 4

The first Wall C Profile is fixed to the wall surface to be started using wall plug and screw.


## STEP 5

Other Wall C profiles are turned and placed between Wall U profiles with maximum 600 mm spacing horizontally according to direction of plasterboard application.

## STEP 6

After Wall C profiles are mounted, insulation materials, if any in the project, are mounted and installation is applied between Wall C profiles.

Wall cladding system independent of existing wall is completed.




## STEP 7

Plasterboards are cut in accordance with the project and 10 mm shorter than ceiling height.



## STEP 8

Cut plaster boards are mounted onto Wall C profiles as staggered, leaving a 10-mm margin from the floor, with suitable screws and screw spacings.




## STEP 9

Plaster board joints are covered using joint tapes of appropriate thickness and width according to the project. Covered joints and screw heads are filled with suitable jointing plaster; after the filling plaster dries, treated area is sandedpapered and leveled with the board.



## STEP 10


Satin plaster is applied, the surface is sandedpapered.



## STEP 11

Application is completed by applying primer and paint.




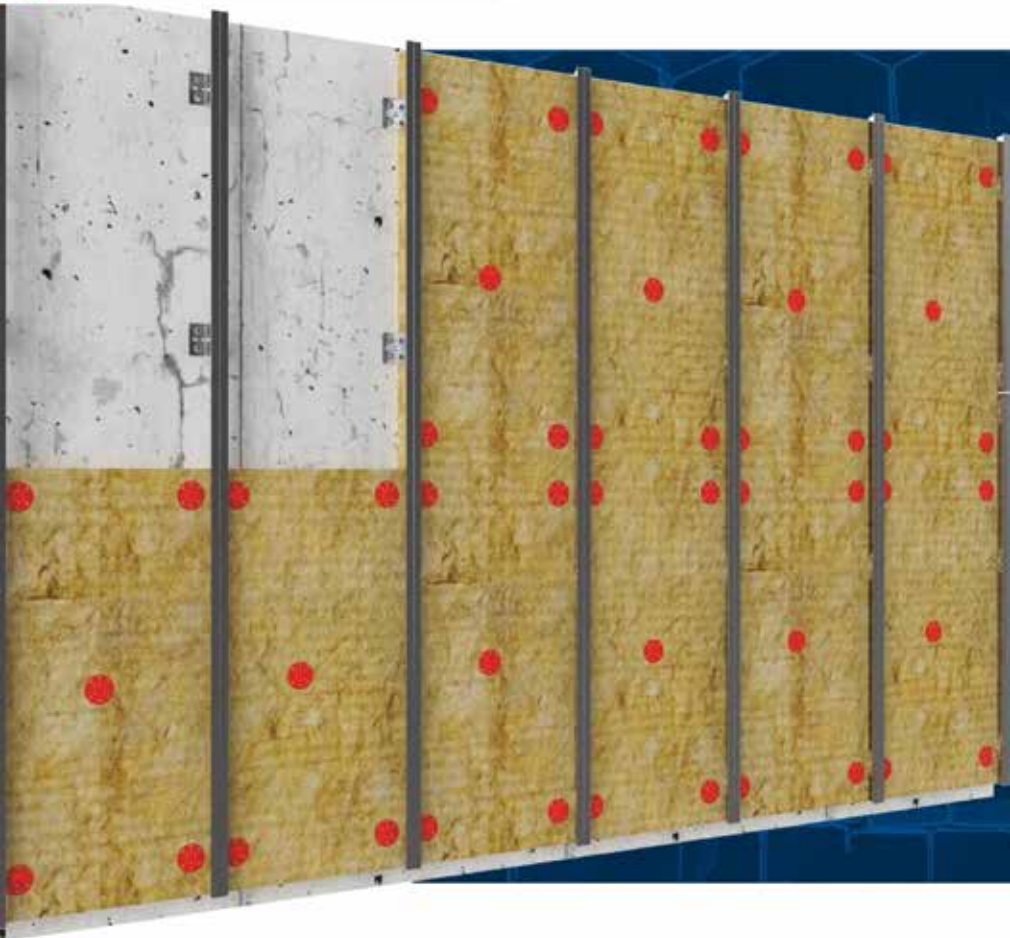

## EXTERIOR WALL

A whole of systems intended to protect against external effects by forming an outer covering outside the construction, strengthen, gain aesthetic appearance, extend building's life, increase energy saving and life quality by providing sound and heat insulation.

## EXTERNAL WALL SYSTEMS

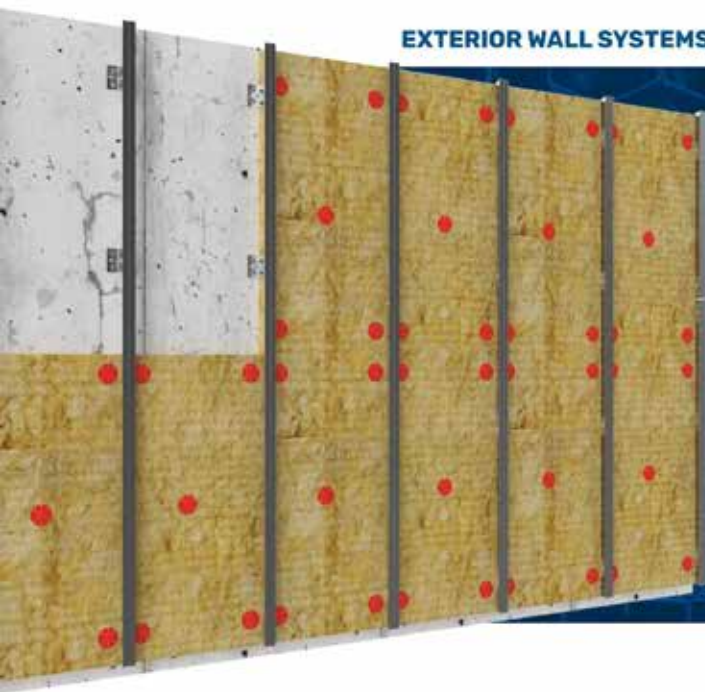

### TYPES

#### Exterior wall system built with CT Profile

Exterior wall system preferred for frontage productions covered with plaster based construction boards.

#### Exterior wall system built with M Profile

Exterior wall systems preferred for frontage productions covered with cement based construction boards.

### FEATURES

- Protects the construction against external effects.
- Provides formation of a planar surface, with a leveled and smooth wall.
- Provides high level sound and heat insulation if suitable boards and insulating materials are used.
- Saves time and labor as it allows quick and easy mounting-demounting.
- Provides the construction with fire resistance with use of suitable board.
- Does not produce bacteria.
- Economical.
- Aesthetical.

### FIELDS OF USE

- Business and shopping centers
- Hospitals
- Schools
- Business centers
- Public buildings
- Housing
- Skyscrapers
- Cottages
- Garden walls

## COMPONENTS OF THE SYSTEM



**CT Profile**

Galvanized horizontal profile that forms a carrier surface for plaster boards vertically by attaching to L brackets.



**M Profile**

Galvanized horizontal profile that forms a carrier surface for plaster boards vertically by fixing to L brackets.



**J Profile**

Galvanized horizontal profile that forms a carrier surface for M profile horizontally by fixing to L brackets.



**L Bracket**

Galvanized L-shaped corner bracket that forms support point for retaining carrier profiles of the system by being fixed to the construction with wall plug and screw.



**Sound Insulation Tape**

Insulation tape used between the wall and wall M/J profile in order to ensure sound insulation for vibrations caused by the construction.



**Trapezoidal Screw**

Type of screw used for connecting M profile and L brackets or CT profile and L brackets.



**Drywall Screw**

Fastener used for securing gypsum plaster or cement boards on CT or M profiles.



**Joint Tape**

Type of setting used for filling joints between gypsum plaster and cement boards at an equal level using filling compound and for preventing crack formation at jointing points.



**Plasterboard**

Multi-purpose construction boards, coated with cardboard on both faces, with plaster in the center. There are 4 different types of plasterboard which are moisture, water resistant, fire-resistant and water and fire resistant plasterboards. Due to high air permeability provides significant contribution in balancing ambient humidity and in ensuring sound and heat insulation when used with proper insulation material.



**Cement Board**

Cement board, double or self-dried multi-purpose construction boards. Due to high air permeability provides significant contribution in balancing ambient humidity and in ensuring sound and heat insulation when used with proper insulation material.



**Steel Wall Plug**

Fasteners used for securing L brackets on the wall.




**Insulation Material**

Mineral wool of different density and thickness values used to increase heat insulation, sound insulation and resistance to fire.



## APPLICATION TYPES

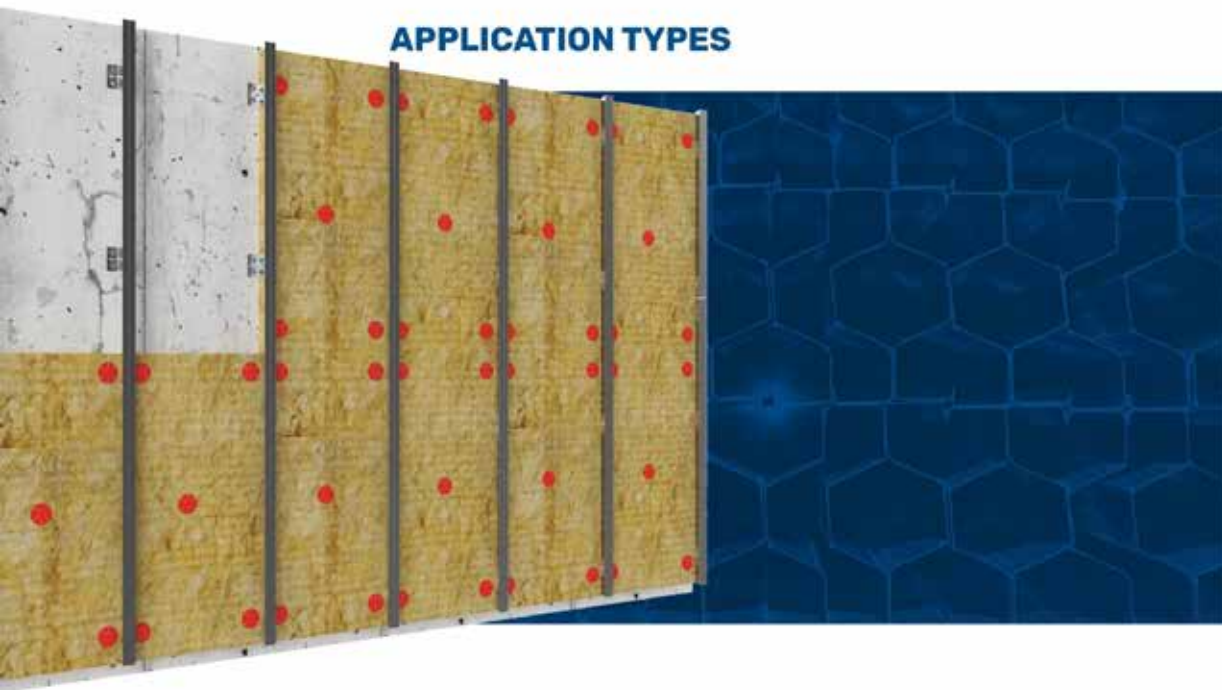

### APPLICATION OF EXTERIOR WALL BUILT WITH CT PROFILE

It is an exterior wall system consisting of L-bracket, CT Profile and plasterboards suitable for exterior wall mounted on these profiles.



## APPLICATION

UMS has specified limit values to be taken into consideration for exterior wall application made with CT profile in the table on the next page. System Analysis table given on the next page can be utilized for the quantity of materials to be consumed.



For proper application:

### LIMIT VALUES FOR EXTERIOR WALL SYSTEM BUILT WITH CT PROFILE

DESCRIPTION	LIMIT VALUE
L Bracket Spacing:	must be maximum 600 mm horizontally
	must be maximum 700 mm vertically
CT Profile Spacing:	must be maximum 600 mm
Plaster Board Screw Spacing:	must be maximum 200 mm

### SYSTEM ANALYSIS FOR EXTERIOR WALL BUILT WITH CT PROFILE


Type of Material	Axial Spacing (mm)	
	600	400
Cement Board or Plaster Board	9.45 m <sup>2</sup>	
CT Profile	17.1 m	25.2 m
L Bracket	25 pcs	36 pcs
Steel Wall Plug	50 pcs	72 pcs
Self-Drilling Screw	50 pcs	72 pcs
Drywall Screw 25	135	180

\* 5 % wastage is taken into account for a limit of WALL CLADDING at 5.00 m height. Quantities may vary depending on the project details.

\* Consumptions may vary depending on project details.




Order of operations given below should be followed for a complete application.




## STEP 1

L bracket alignment is determined using auxiliary equipment including laser, chalk line, water balance etc.




## STEP 2

Leaving maximum 600 mm spacing horizontally and maximum 700 mm vertically, L brackets are mounted using suitable couple of wall plug and screw, so that at least two of the three carrier L brackets on the vertical correspond to load-bearing column or post.




## STEP 3

After completion of L anchorage applications, optionally, rockwools are applied to the frontage so as to be coated on L brackets. At least 5 parachute dowels should be mounted on each insulation wool plate, optionally, metal parachute dowels should be mounted at the center points in order to ensure fire resistance.




## STEP 4

After rockwools are mounted, roller shaped moisture barriers are applied to the frontage so as to overlap. Overlapped surfaces should be covered by means of tape suitable for moisture barrier. Points where moisture barriers are torn by L brackets are covered using insulation tapers.



## STEP 5


Frontage is leveled and CT profiles are screwed to L brackets with maximum 600 mm spacings using trackzoid screws, when starting from the floor, CT profiles should be applied by leaving at least 50 mm space for waterproofing.

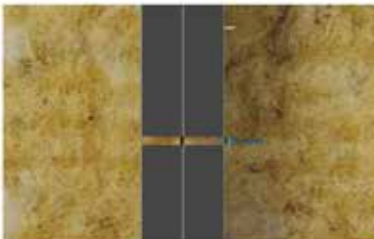

## STEP 6

In vertical joints, in order to ensure operation of the system minimum 5 mm should be left between the two CT profiles.


Exterior wall system built with CT Profile is completed.



Following steps are written with reference to plaster based exterior wall board application. Order and content of steps may vary when different materials are used.


## STEP 7

Plaster based exterior wall boards are mounted on CT profiles by means of countersunk screws so that they correspond to CT profiles horizontally and with maximum 200 mm spacings vertically. Board mounting should be made in a staggered way.




## STEP 8

After board mounting is finished, joining points are covered with joint netting.



## STEP 9

Joint cavities and screw heads are filled with jointing plaster. Vertically and horizontally. Following drying of jointing plaster, jointing points and screw heads are sanded/papered and leveled with the board.




## STEP 10

Cement based coating and plaster based board surface is covered at appropriate thickness according to the project. After setting, one coat of exterior wall primer and two coats of exterior wall paint is applied and application is ended.



## APPLICATION TYPES

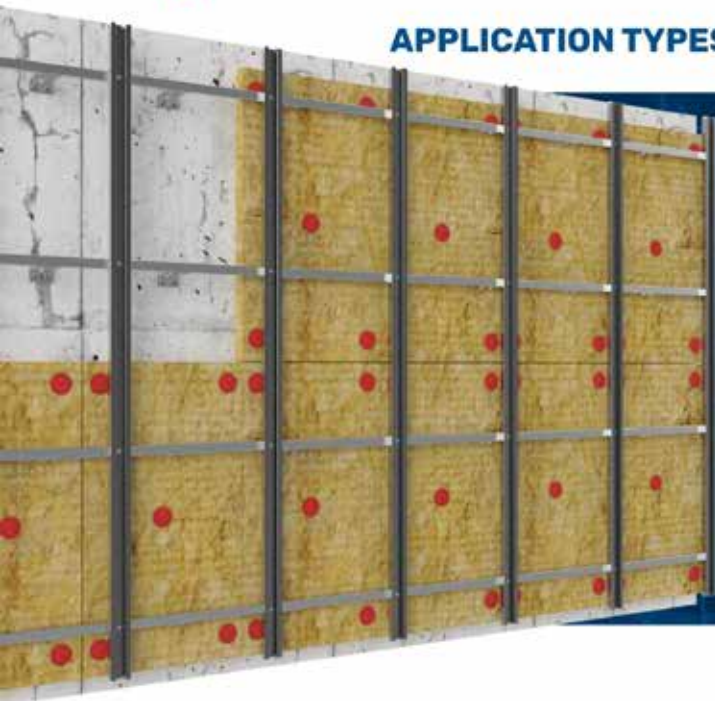


## EXTERIOR WALL APPLICATION WITH M PROFILE

Exterior wall system consisting of L bracket, J profile, M profile and cement boards mounted on these profiles.

**APPLICATION**

UMS has specified limit values to be taken into consideration for exterior wall application made with M profile in the table on the next page. System Analysis Table given on the next page can be utilized for the quantity of materials to be consumed.

# HeedGROUP

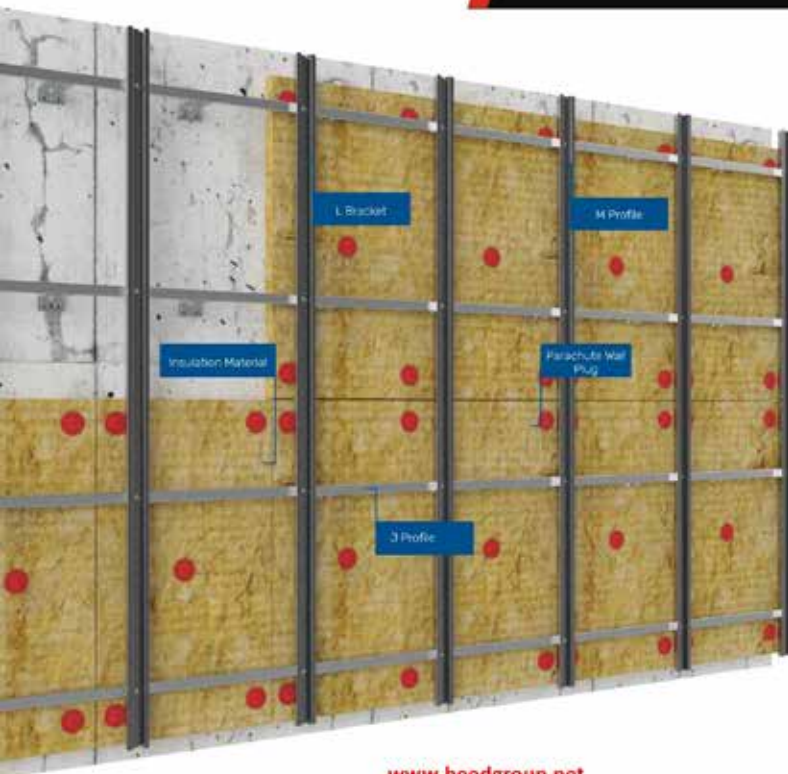

For proper application:

**LIMIT VALUES FOR EXTERIOR WALL SYSTEM BUILT WITH M PROFILE**

DESCRIPTION	LIMIT VALUE
L Bracket Spacing:	must be maximum 1000 mm horizontally must be maximum 1000 mm vertically
D Profile Spacing:	must be maximum 1000 mm
M Profile Spacing:	must be maximum 625 mm
Cement Board Screw Spacing:	must be maximum 400 mm


**SYSTEM ANALYSIS FOR EXTERIOR WALL BUILT WITH M PROFILE**

Type of Material	Axial Spacing (mm)	
	400	400
Cement Board or Plaster Board	9,45 m <sup>2</sup>	
M Profile	17,1 m	25,2 m
D Profile	14,4 m	
L Bracket	25 pcs	36 pcs
Steel Wall Plug	50 pcs	72 pcs
Self-Drilling Screw	75 pcs	95 pcs
Drywall Screw 25	135	180

\* 15 % wastage is taken into account for a lot of M&L. CLADDING at 3,00 m height. Guard has may vary depending on the project details.


\* Consumptions may vary depending on project details.

Order of operations given below should be followed for a complete application.




## STEP 1

L bracket alignment is determined using auxiliary equipment including laser, chalk line, water balance etc.




## STEP 2

Leaving maximum 1000 mm spacing horizontally and maximum 1000 mm vertically, L brackets are mounted using suitable couple of wall plug and screw, so that at least two of the three carrier L brackets on the vertical correspond to load-bearing column or post.




## STEP 3

After completion of L anchorage applications, optionally, rockwool is applied to the frontage so as to be coated on L brackets. At least 5 parachute dowels should be mounted on each insulation wool plate, optionally, metal parachute dowels should be mounted at the center points in order to ensure fire resistance.




## STEP 4

After rockwool is mounted, roller-shaped moisture barriers (optional) are applied to the frontage so as to overlap. Overlapped surfaces should be covered by means of tape suitable for moisture barrier. Points, where moisture barriers are torn by L brackets are covered using insulation tapes.



## STEP 5

M profiles are mounted using trapezoid screws to form support point horizontally onto anchorages that are attached to the frontage horizontally by means of wall plugs with a maximum spacing of 1000 mm. In J profile application, profiles should be levelled and planar.




## STEP 6

In vertical joints, at least 5 mm should be left between the two M profiles in order to ensure operation of the system. M profiles level the frontage and are screwed to J profiles using trapezoid screws from the center channel with a maximum spacing of 625 mm, when starting from the floor. J profiles should be applied by leaving at least 50 mm space for waterproofing.




Exterior wall system built with M Profile is completed.



\*Following steps are written with reference to cement based exterior wall board application. Order and content of steps may vary when different materials are used.


## STEP 7

Cement based exterior wall boards are mounted on M profiles by means of countersunk screws so that they correspond to M profiles horizontally and with maximum 400 mm spacings vertically.




## STEP 8

During mounting boards, cement boards should sit on M profile at equal amounts and at least 5 mm joint space should be left.



## STEP 9

Screed points are fixed using acrylic sealant or polyester sealant. After the sealants dry out points where sealant is applied are sanded and leveled with the board.



## STEP 10

One coat of exterior wall primer and two coats of exterior wall paint is applied and application is completed.

# HeedGROUP



[www.heedgroup.net](http://www.heedgroup.net)

The logo for Heed GROUP, with 'Heed' in red and 'GROUP' in white, set against a black background with a red curved border.

# Heed GROUP

A close-up, angled view of a white, rectangular suspended ceiling profile, showing its internal structure and mounting clips.

## SUSPENDED CEILING PROFILES

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead



## CEILING U PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Carrier Ceiling C profiles and plaster boards.

### Usage Area

- Suspended ceiling systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,35 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 24 pcs/bundle
- Steel Type: DX51D (EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

Produced in accordance with TS EN 14195 for Metal Framework Components Used in Plaster Board Systems.

### Advantages


- A stronger form is achieved by increasing section strength as a result of R&D activities. This form is registered and taken under protection with Utility Model Certificate.
- It has a wide range of accessories.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,35	28	22	0,1315	0,3680
0,40	28	22	0,1508	0,4224
0,45	28	22	0,1702	0,4772
0,50	28	22	0,1898	0,5325
0,60	28	22	0,2293	0,6444
0,40	28	24	0,1900	0,4529
0,45	28	24	0,2145	0,5116
0,50	28	24	0,2391	0,5709
0,60	28	24	0,2887	0,6908
0,45	28	27	0,2938	0,5632
0,50	28	27	0,3274	0,6284
0,60	28	27	0,3950	0,7604

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling C Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CEILING C PROFILE

Scan QR code for more information.



### Definition

Profiles made of hot dip galvanized steels using cold forming method, and used as main and auxiliary carriers in suspended ceiling systems.

### Usage Area

- Suspended ceiling systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- A stronger form is achieved by increasing section strength as a result of R&D activities. This form is registered and taken under protection with Utility Model Certificate.
- It has a wide range of accessories.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

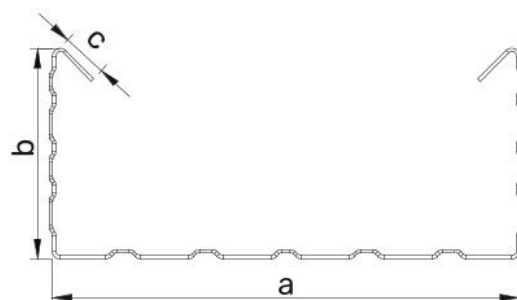

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	60	27	6	0,4822	3,0452
0,45	60	27	6	0,5391	3,4149
0,50	60	27	6	0,5951	3,7823
0,60	60	27	6	0,7050	4,5098

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling U Profile, L Corner Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## CEILING U 25 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Carrier Ceiling C profiles and plaster boards.

### Usage Area

- Suspended ceiling systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,30 mm – 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 24 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Screw fastening capability is increased through surface forming as a result of R&D activities.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,30	25	22	0,1126	0,2500
0,35	25	22	0,1318	0,2931
0,40	25	22	0,1512	0,3366
0,45	25	22	0,1706	0,3805
0,50	25	22	0,1902	0,4248

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling C 42 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CEILING C 42 PROFILE



### Definition

Profiles made of hot dip galvanized steels using cold forming method, and used as main and auxiliary carriers in suspended ceiling systems.

### Usage Area

- Suspended ceiling systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Screw fastening capability is increased through surface forming as a result of R&D activities.
- Wide range of accessories for project applications.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

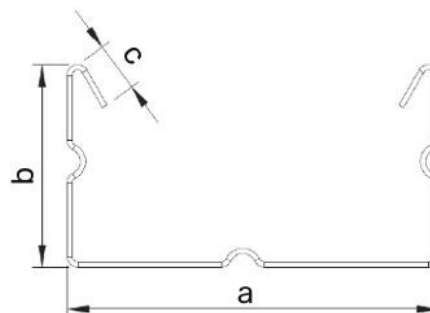

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	42	25	6	0,3130	1,2448
0,45	42	25	6	0,3440	1,3841
0,50	42	25	6	0,3733	1,5199
0,60	42	25	6	0,4270	1,7810

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling U Profile, L Corner Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## CEILING OMEGA U PROFILE

Scan QR code for more information.



### Definition

Main carrier profiles made of hot dip galvanized steels using cold forming method that carry, in suspended ceiling systems, Ceiling Omega Profiles and the system.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,40 mm – 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Screw fastening capability is increased through surface forming as a result of R&D activities.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	25	11	0,0199	0,1776
0,45	25	11	0,0222	0,1983
0,50	25	11	0,0244	0,2188
0,40	38	11	0,0211	0,4782
0,45	38	11	0,0236	0,5351
0,50	38	11	0,0260	0,5914

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Omega Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CEILING OMEGA PROFILE

Scan QR code for more information.



### Definition

Auxiliary carrier profiles made of hot dip galvanized steels using cold forming method that are fastened, in suspended ceiling systems, to Omega Ceiling U profiles with special clips.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,40 mm – 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Screw fastening capability is increased through surface forming as a result of R&D activities.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

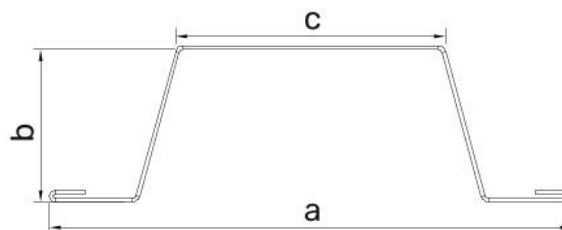

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	68	22	35	0,3289	1,9116
0,45	68	22	35	0,3703	2,1572
0,50	68	22	35	0,4117	2,4044
0,40	83	22	50	0,3614	3,3764
0,45	83	22	50	0,4070	3,8084
0,50	83	22	50	0,4527	4,2427

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling Omega U Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead



## CEILING OMEGA 45 PROFILE

Scan QR code for more information.



### Definition

Auxiliary carrier profiles made of hot dip galvanized steels using cold forming method that are fastened, in suspended ceiling systems, to Omega Ceiling U profiles with special clips.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Screw fastening capability is increased through surface forming as a result of R&D activities.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

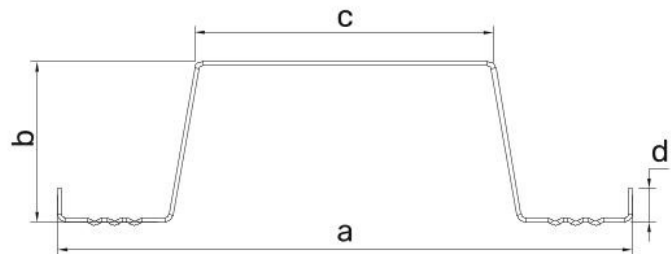

Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	86	24	45	5	0,5482	3,7154
0,45	86	24	45	5	0,6169	4,1700
0,50	86	24	45	5	0,6835	4,6224
0,60	86	24	45	5	0,8181	5,5207

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling Omega U Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## CEILING C 47 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method, and used in single-frame suspended ceiling systems.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,50 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste

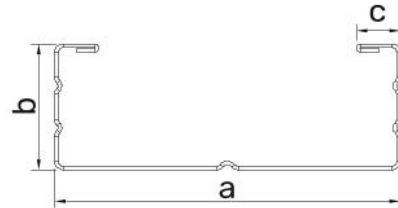

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	47	18	6	0,2454	1,6893
0,60	47	18	6	0,2878	2,0039

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

L Corner Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead

## CLAMPING L CORNER PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Carrier Ceiling C profiles and plaster boards.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,50 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 25 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

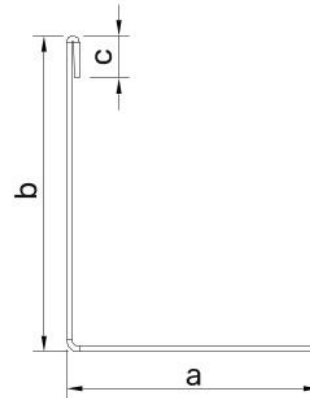

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	24	30	4	0,0789	0,3959
0,60	24	30	4	0,0942	0,4712
0,50	24	35	4	0,0891	0,5455
0,60	24	35	4	0,1063	0,6497

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling C Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CEILING SURROUNDING PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, used for leveling metal suspended ceiling carrier system components.

### Usage Area

- Metal suspended ceiling systems

### Technical Specifications

- Thickness: 0,40 mm
- Length: 3000 mm standard length\*
- Packaging: 50 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Paint Code: RAL 9016 (White)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 13964 Standard for Suspended Ceiling Carrier Surrounding Profiles Made of Galvanized Steel Used in Building.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	19	19	3	0,0284	0,1210

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead



## L CORNER SUSPENSION PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method that ensure fastening of Ceiling Omega U Profile to the ceiling in Omega Profile Suspended Ceiling applications.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,70 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 25 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,70	25	25	0,0855	0,3496
0,80	25	25	0,0970	0,3971
0,70	30	30	0,1493	0,6083
0,80	30	30	0,1696	0,6917

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling Omega Profile

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## SPECIAL U PROFILES

Scan QR code for more information.



### Definition

Profiles made of hot dip galvanized steels using cold forming method and used for leveling carrier box profiles in metal construction installed for constructing plasterboard suspended ceiling and the plasterboard suspended ceiling.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 1,00 mm – 1,50 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle (U20-U30-U40)  
6 pcs/bundle (U50-U60)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
1,00	20	30	0,5782	0,7241
1,20	20	30	0,6759	0,8568
1,50	20	30	0,8121	1,0485
1,00	30	40	1,8272	1,8374
1,20	30	40	2,1662	2,1707
1,50	30	40	2,6366	2,6727
1,00	40	40	2,0228	3,4494
1,20	40	40	2,4051	4,0815
1,50	40	40	2,9652	4,9950
1,00	50	40	2,1875	5,6450
1,20	50	40	2,6024	6,6942
1,50	50	40	3,2111	8,2197
1,00	60	40	2,3281	8,4742
1,20	60	40	2,7708	10,0642
1,50	60	40	3,4208	12,3856

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Screws and UMS Accessories



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead



## SEISMIC U PROFILE

### Definition

Non-carrier profiles that are made of hot dip galvanized steels using cold forming method and ensure leveling of the construction in seismic suspended ceiling systems and that are suitable for use with seismic clips thanks to their clamping structure.

### Usage Area

- Seismic suspended ceiling systems

### Technical Specifications

- Thickness: 0,50 – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs/bundle
- Steel Type: DX 51D (Complies with EN 10346 standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Advantages


- Suitable for use in seismic clips thanks to its clamping structure.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

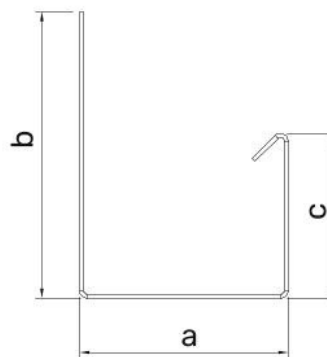

Kalınlık (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	32	44	27	0,6643	1,2188
0,60	32	44	27	0,7831	1,4522

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling C Profile, Seismic Clip, Screws and UMS Accessories



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CEILING L CORNER PROFILE

### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Carrier Ceiling C profiles and plaster boards.

### Usage Area

- Suspended ceiling systems

### Technical Specifications

- Thickness: 0,35 - 0,60 mm
- Length: 3000 mm standard length\*
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)
0,35 - 0,50	22	22
0,40 - 0,50	25	25
0,40 - 0,50	30	30
0,40 - 0,50	35	35
0,45 - 0,60	50	50

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Ceiling C Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.




Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead



# HeeD GROUP

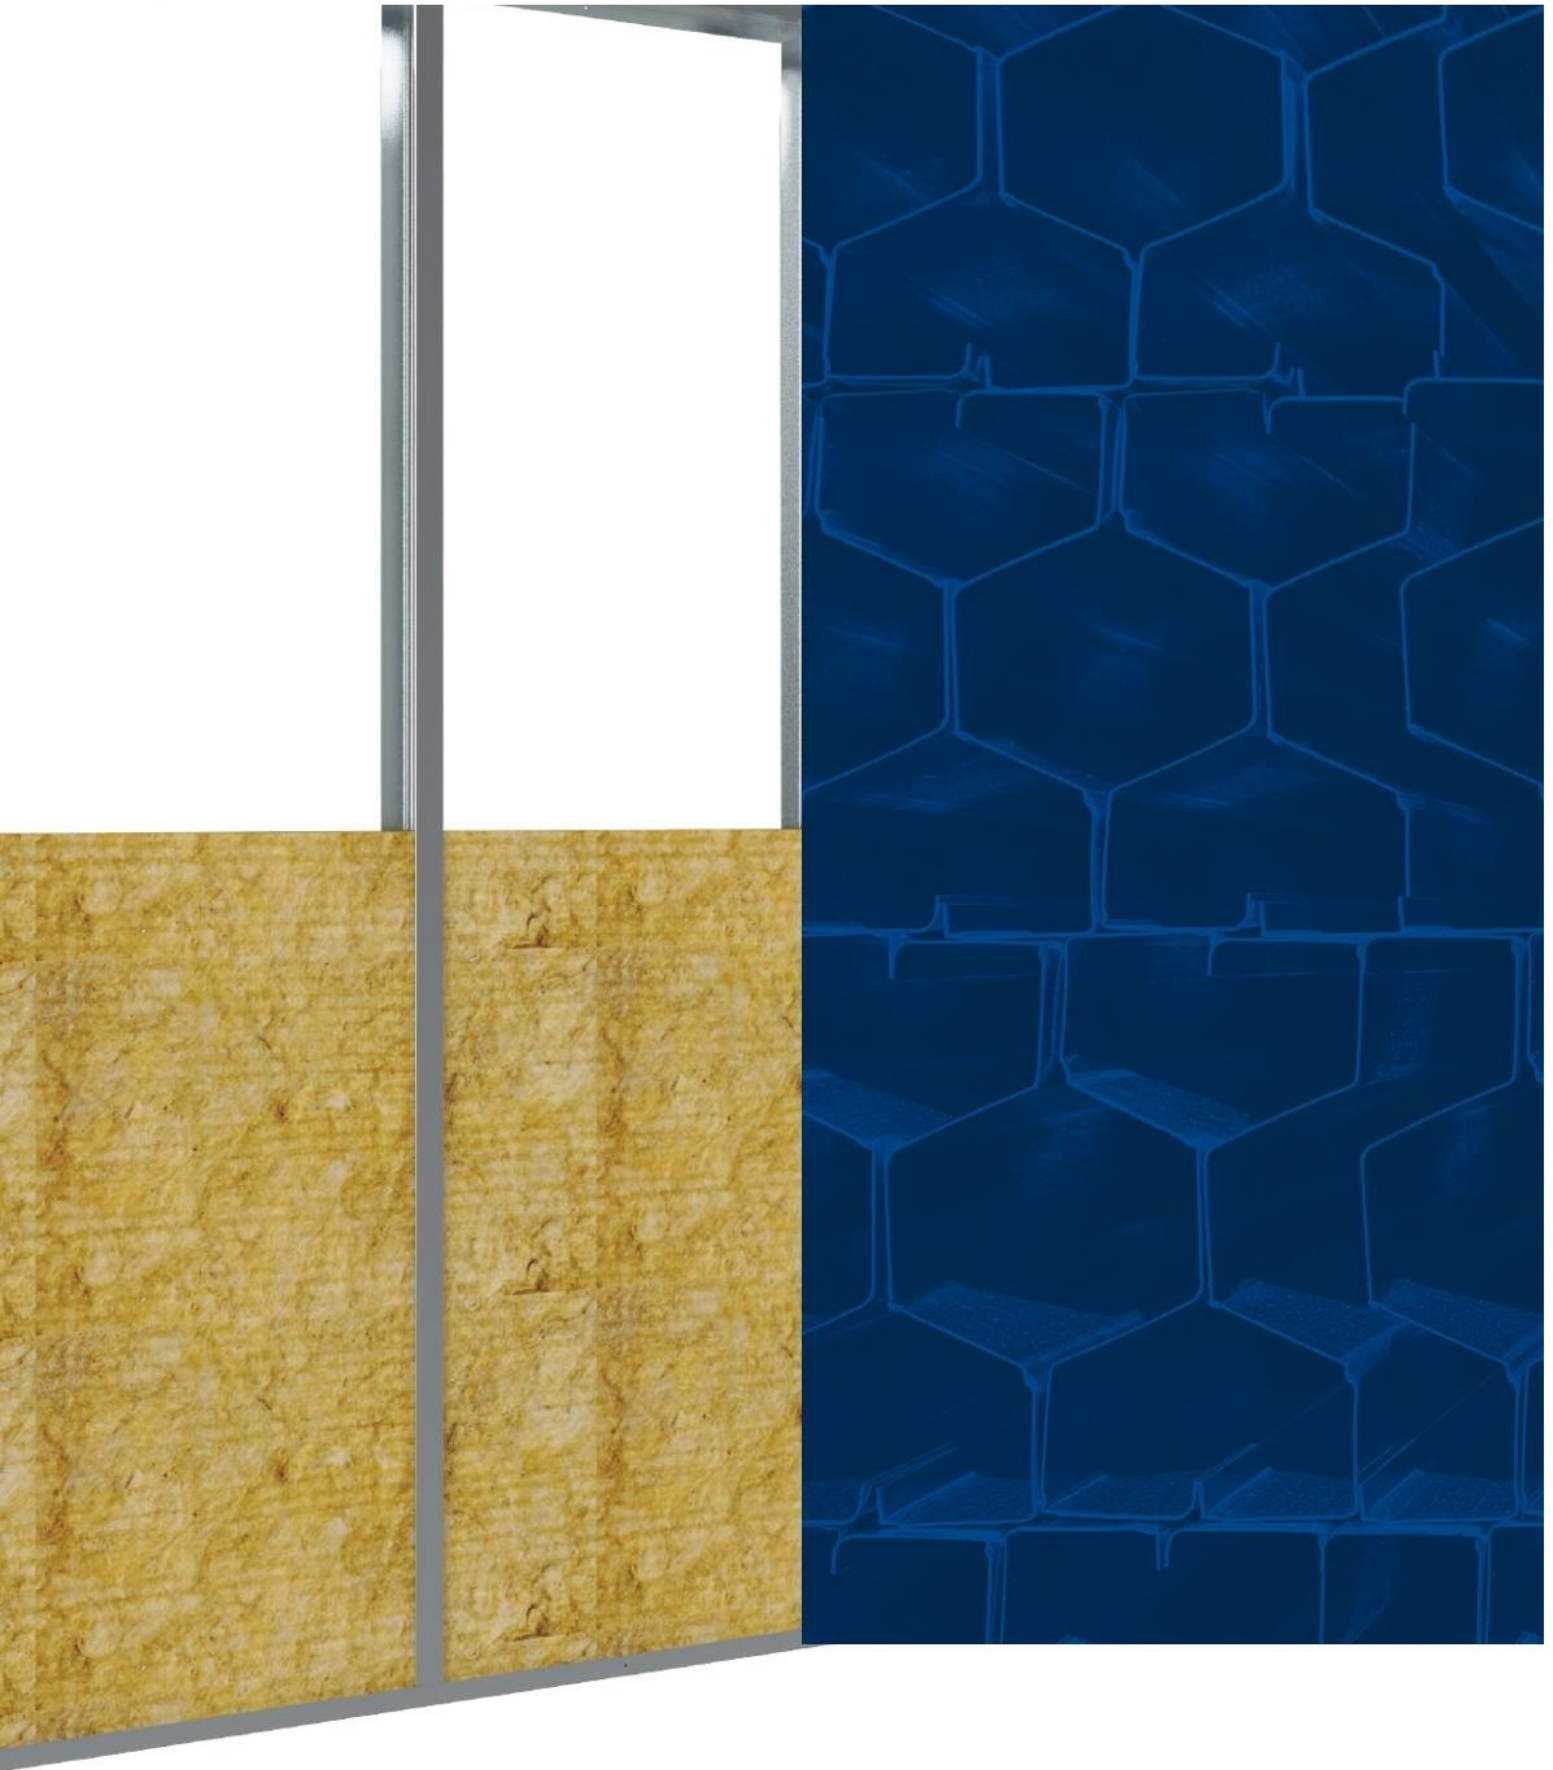

[www.heedgroup.net](http://www.heedgroup.net)

**PARTITION WALL  
PROFILES**



## WALL U 48 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 48 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 0,45 mm- 0,60 mm: 12 pcs/bundle  
0,70 mm- 0,80 mm: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	$I_x^*$ (cm <sup>4</sup> )	$I_y^*$ (cm <sup>4</sup> )
0,45	48	28	0,3773	1,8722
0,50	48	28	0,4204	2,0858
0,60	48	28	0,5072	2,5164
0,70	48	28	0,5949	2,9517
0,80	48	28	0,6836	3,3915

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 48 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 48 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 48 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle (0,45 mm – 0,60 mm)  
8 pcs/bundle (0,70 mm – 0,80 mm)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Section strength is increased by means of geometric form extending along the profile base and sidewalls.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

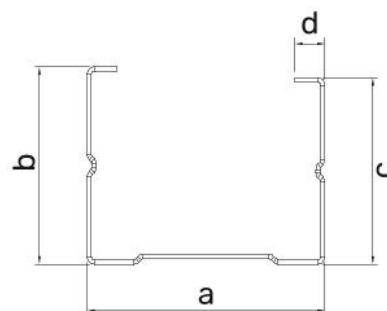

Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	48	36	34	6	0,9234	2,3843
0,50	48	36	34	6	1,0200	2,6379
0,60	48	36	34	6	1,2098	3,1385
0,70	48	36	34	6	1,3950	3,6303
0,80	48	36	34	6	1,5757	4,1134

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 48 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead

## WALL U 50 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 50 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,35 mm – 0,70 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,35	50	24	0,1961	1,3780
0,40	50	24	0,2235	1,5706
0,40	50	30	0,4116	1,8659
0,45	50	30	0,4619	2,0937
0,50	50	30	0,5120	2,3203
0,60	50	30	0,6113	2,7700
0,40	50	38	0,7816	2,2595
0,45	50	38	0,8775	2,5356
0,50	50	38	0,9731	2,8104
0,60	50	38	1,1631	3,3557
0,70	50	38	1,3516	3,8956

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 50 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 50 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 50 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 – 1,00 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle (0,45 mm – 0,60 mm)  
8 pcs/bundle (0,70 mm – 1,00 mm)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Section strength is increased by means of geometric form extending along the profile base and sidewalls.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	49	35	6	0,9470	2,4734
0,50	49	35	6	1,0476	2,7394
0,60	49	35	6	1,2462	3,2662
0,45	49	42	6	1,4862	2,8476
0,50	49	42	6	1,6451	3,1543
0,60	49	42	6	1,9595	3,7621
0,45	49	47	6	1,9642	3,1127
0,50	49	47	6	2,1750	3,4484
0,60	49	47	6	2,5924	4,1135
0,80	49	47	6	3,4099	5,4198
0,90	49	47	6	3,8101	6,0610
1,00	49	47	6	4,1655	6,6314

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 50 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead

## WALL U 68 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 68 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

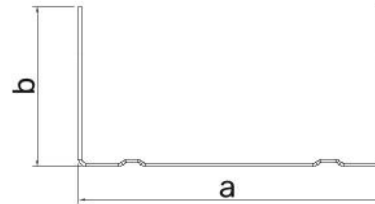

Thickness (mm)	a (mm)	b (mm)	$I_x^*$ (cm <sup>4</sup> )	$I_y^*$ (cm <sup>4</sup> )
0,50	68	40	1,2319	5,7942
0,50	68	55	2,9156	7,5028

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 68 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 68 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 68 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

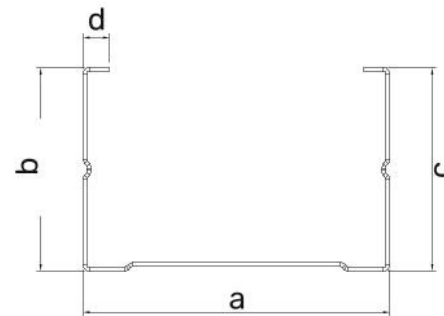

Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	68	42	42	6	1,8336	6,3460

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 68 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL U 70 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 70 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 0,45 mm- 0,60 mm: 12 pcs/bundle  
0,70 mm- 0,80 mm: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

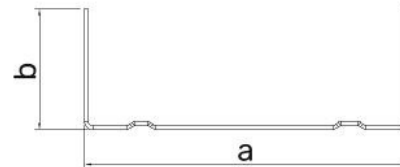

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	70	28	0,4443	4,4376
0,50	70	28	0,4950	4,9404
0,60	70	28	0,5970	5,9519
0,70	70	28	0,7002	6,9712
0,80	70	28	0,8444	7,9989
0,50	70	40	1,2434	6,1840
0,50	70	55	2,9440	7,9953

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 70 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 70 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 70 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm - 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle (0,45 mm - 0,60 mm)  
8 pcs/bundle (0,70 mm - 0,80 mm)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

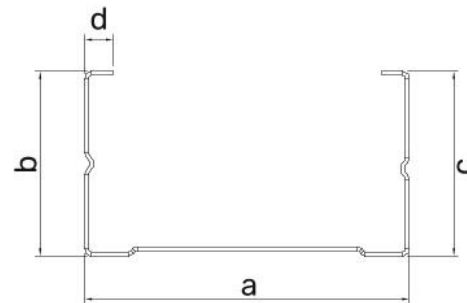

Thickness (mm)	a (mm)	b (mm)	c (mm)	d (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	70	36	34	6	1,0372	5,5526
0,50	70	36	34	6	1,1459	6,1481
0,60	70	36	34	6	1,3594	7,3265
0,70	70	36	34	6	1,5679	8,4882
0,80	70	36	34	6	1,7713	9,6331
0,50	70	42	42	6	1,8520	6,7771

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 70 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL U 75 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 75 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,35 mm – 0,70 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

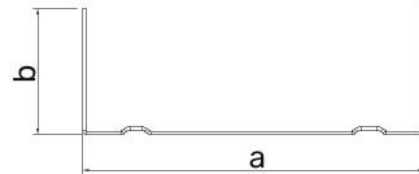

Kalınlık (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,35	75	24	0,2226	3,4871
0,40	75	24	0,2536	3,9751
0,40	75	30	0,4662	4,6991
0,45	75	30	0,5232	5,2766
0,50	75	30	0,5800	5,8521
0,60	75	30	0,6926	6,9964
0,40	75	38	0,8908	5,5895
0,45	75	38	1,002	6,2770
0,50	75	38	1,1092	6,9621
0,60	75	38	1,3260	8,3250
0,70	75	38	1,5411	9,6780

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 75 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 75 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 75 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm - 1,00 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle (0,45 mm - 0,60 mm)  
8 pcs/bundle (0,70 mm - 1,00 mm)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

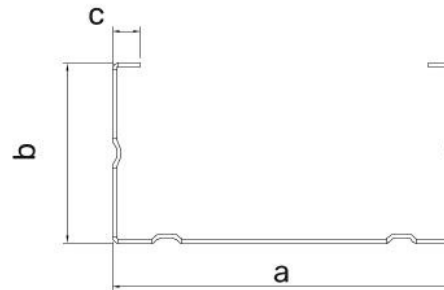

Kalınlık (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	74	35	6	1,0905	6,2668
0,50	74	35	6	1,2065	6,9461
0,60	74	35	6	1,4354	8,2946
0,45	74	42	6	1,7109	7,1188
0,50	74	42	6	1,8941	7,8915
0,60	74	42	6	2,2562	9,4260
0,45	74	47	6	2,2621	7,7274
0,50	74	47	6	2,5051	8,5668
0,60	74	47	6	2,9862	10,2341
0,80	74	47	6	3,9288	13,5235
0,90	74	47	6	4,3905	15,1456
1,00	74	47	6	4,8006	16,5928

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 75 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL U 91 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 91 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle (b=28, thickness=0,40-0,60)  
8 pcs/bundle (b=38, at all thicknesses)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Özel siparişlerde 2000-8000 mm aralığında üretim yapılmaktadır.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

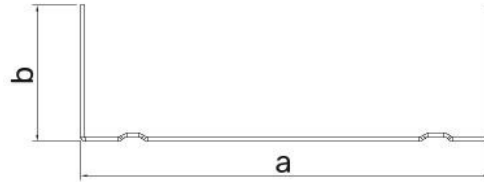

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	92	33	0,6445	7,9791
0,45	92	33	0,7234	8,9584
0,50	92	33	0,8020	9,9337
0,60	92	33	0,9580	11,8723

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 91 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 91 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 91 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

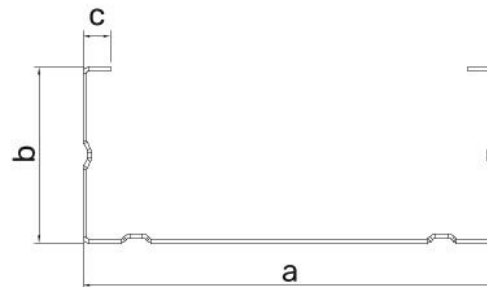

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	91	35	6	1,0333	8,8242
0,45	91	35	6	1,1561	9,8980
0,50	91	35	6	1,2774	10,9653
0,60	91	35	6	1,5159	13,0807

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 91 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL U 100 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 100 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,70 mm
- Length: 3000 mm standard length\*
- Packaging: 12 pcs/bundle (b=28, thickness=0,40-0,60)  
8 pcs/bundle (b=38, at all thicknesses)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

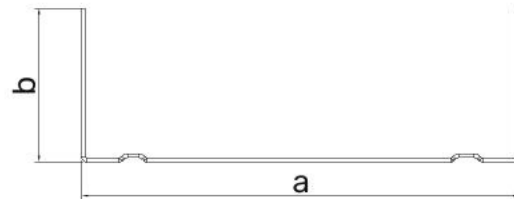

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	100	28	0,4155	8,8218
0,45	100	28	0,4663	9,9097
0,50	100	28	0,5168	10,9943
0,60	100	28	0,6170	13,1537
0,40	100	38	0,9690	10,8058
0,45	100	38	1,0880	12,1395
0,50	100	38	1,2066	13,4694
0,60	100	38	1,4425	16,1178
0,70	100	38	1,6766	18,7513

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 100 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 100 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 100 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 1,00 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

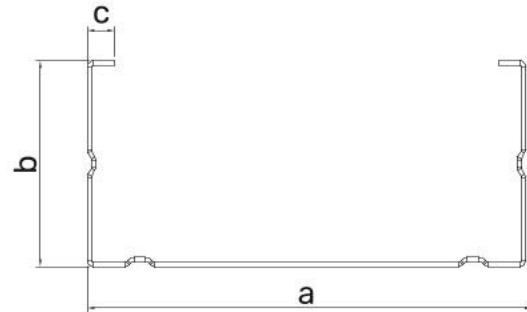

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	99	35	6	1,1929	12,2341
0,50	99	35	6	1,3197	13,5657
0,60	99	35	6	1,5700	16,2125
0,45	99	42	6	1,8777	13,7638
0,50	99	42	6	2,0787	15,2636
0,60	99	42	6	2,4763	18,2458
0,45	99	47	6	2,4870	14,8564
0,50	99	47	6	2,7542	16,4764
0,60	99	47	6	3,2832	19,6982
0,80	99	47	6	4,3198	26,0692
0,90	99	47	6	4,8275	29,2185
1,00	99	47	6	5,2785	32,0324

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 100 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL U 120 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 120 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

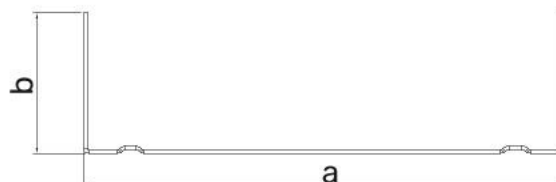

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	120	40	1,3164	19,2360
0,50	120	40	1,4601	21,3476
0,60	120	40	1,7459	25,5556

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 120 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 120 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 120 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,50 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

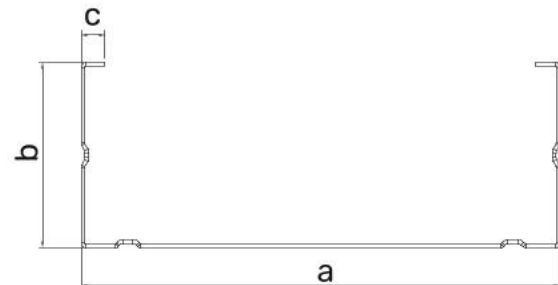

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	120	42	6	3,2440	23,7774
0,60	120	42	6	3,8681	31,4302
0,70	120	42	6	4,4840	36,5492
0,80	120	42	6	5,0918	41,6343

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 120 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

[www.heedgroup.net](http://www.heedgroup.net)

#onestepahead

## WALL U 125 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 125 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

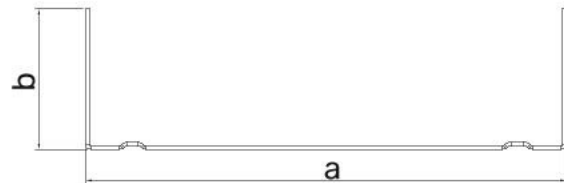

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	125	32	0,7145	18,3803
0,50	125	32	0,7921	20,3977
0,60	125	32	0,9463	24,4175
0,45	125	40	1,3304	21,1726
0,50	125	40	1,4756	23,4978
0,60	125	40	1,7644	28,1317

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 125 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 125 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 125 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,50 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

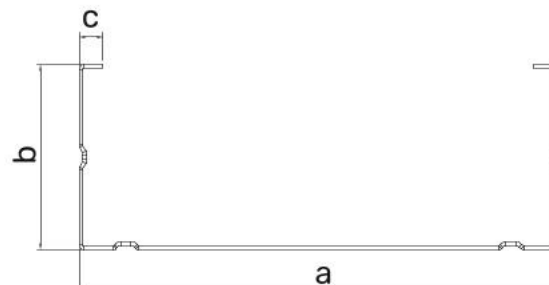

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	124	49	6	3,2758	28,3305
0,60	124	49	6	3,9059	33,8882
0,70	124	49	6	4,5278	39,4101
0,80	124	49	6	5,1416	44,8962

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 125 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL U 140 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 140 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

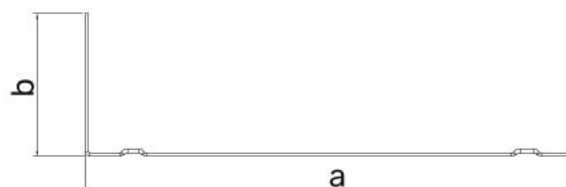

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	141	33	0,7154	22,0282
0,45	141	33	0,8030	24,7445
0,50	141	33	0,8903	27,4526
0,60	141	33	1,0636	32,8442

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 140 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL C 140 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 140 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,40 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 4 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

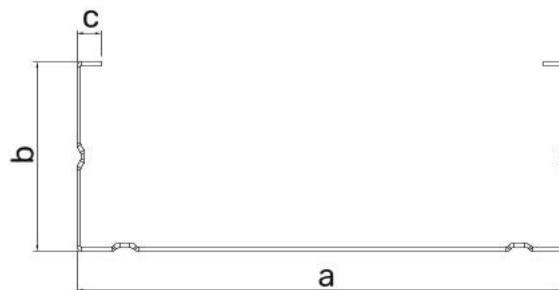

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,40	140	35	6	1,1628	24,2289
0,45	140	35	6	1,3010	27,1937
0,50	140	35	6	1,4375	30,1444
0,60	140	35	6	1,7058	36,0037

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 140 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## WALL U 150 PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, for leveling Wall C 150 profiles.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,45 mm – 0,60 mm
- Length: 3000 mm standard length\*
- Packaging: 8 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

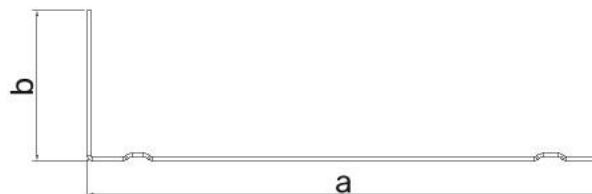

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	150	32	0,7436	28,6145
0,50	150	32	0,8243	31,7603
0,60	150	32	0,9848	38,0319
0,45	150	40	1,3911	32,6403
0,50	150	40	1,5429	36,2304
0,60	150	40	1,8450	43,3888

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall C 150 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## WALL C 150 PROFILE

Scan QR code for more information.



### Definition

Carrier profiles made of hot dip galvanized steels using cold forming method and used in interior partition wall and wall cladding applications by being fitted into Wall U 150 profile.

### Usage Area

- Partition wall systems
- Wall cladding systems

### Technical Specifications

- Thickness: 0,50 mm – 0,80 mm
- Length: 3000 mm standard length\*
- Packaging: 4 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has higher strength compared to standard profiles thanks to embossing technology used.
- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

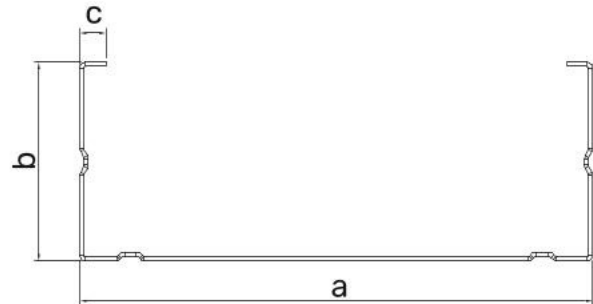

Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	149	49	6	3,4517	43,3349
0,60	149	49	6	4,1156	51,8532
0,70	149	49	6	4,7709	60,3229
0,80	149	49	6	5,4175	68,7437

\* Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U 150 Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## UA PROFILE

Scan QR code for more information.



### Definition

Carrier profiles, made of hot dip galvanized steels using cold forming method, for assembly of door and window frames.

### Usage Area

- Partition wall systems

### Technical Specifications

- Thickness: 1,50 mm – 2,00 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs / bundle (UA 50)  
4 pcs/bundle (UA 75 and UA 100)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Facilitates fixing bolts-nuts by means of the slots opened on the surface of the bottom.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

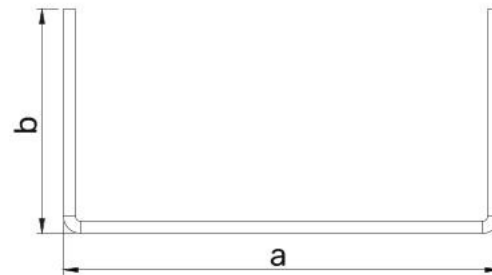

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
1,50	49	40	3,1943	7,8221
2,00	49	40	4,1678	10,1177
1,50	74	40	3,6715	19,9055
2,00	74	40	4,7998	25,9527
1,50	99	38	4,0091	39,0356
2,00	99	38	5,2458	51,1057

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

UA Console, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## SPECIAL WALL C PROFILES

Scan QR code for more information.



### Definition

Carrier elements made of hot dip galvanized steels using cold forming method and used together with Wall U profiles of appropriate size at high wall openings in order to increase strength.

### Usage Area

- Partition wall systems

### Technical Specifications

- Thickness: 1,20 mm – 2,00 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs/bundle (DC 50)  
4 pcs/bundle (DC 75–DC 100)
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000–8000 mm is provided for special orders.

### Standards

- Produced in accordance with TS EN 14195 for Metal Framework Components Used in Gypsum Plasterboard Systems.

### Advantages


- Has suitable holes for installation passage for easy installation of electrical and plumbing materials.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

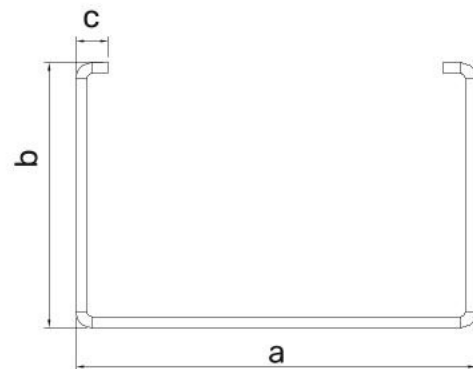

Thickness (mm)	a (mm)	b (mm)	c (mm)	I <sub>y</sub> * (cm <sup>4</sup> )	I <sub>y</sub> * (cm <sup>4</sup> )
1,20	49	49	6	5,3926	8,0424
1,50	49	49	6	6,5610	9,8316
2,00	49	49	6	8,3580	12,6276
1,20	74	49	6	6,2329	20,0957
1,50	74	49	6	7,5906	24,6824
2,00	74	49	6	9,6852	31,9532
1,20	99	49	6	6,8648	38,7660
1,50	99	49	6	8,3629	47,7361
2,00	99	49	6	10,6770	62,0643

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Wall U Profile, Screws and UMS Accessories



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CORNER PROFILE

Scan QR code for more information.



### Definition

Profiles, made of hot dip galvanized steels using cold forming method, used for enhancing strength in the wall and window corners.

### Usage Area

- Interior walls

### Technical Specifications

- Thickness: 0,30 mm – 0,50 mm
- Length: 2700-3000 mm
- Packaging: 25 pcs/bundle – 100 pcs/parcel
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Advantages


- Upholds plaster strongly thanks to special pattern hollow structure of the wings.
- Can be manufactured in U and V corner forms.
- Can be manufactured at any length.
- Provides resistance to moisture and extends its life with TOC (Thin Organic Coating) coated material option.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

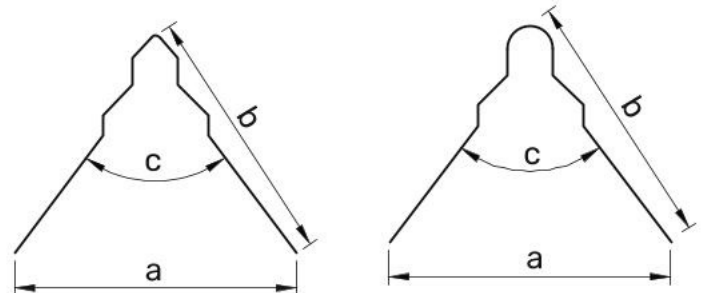

Thickness (mm)	a (mm)	b (mm)	c (°)
0,30	33	33	70°
0,35	33	33	70°
0,30	35	35	70°
0,35	35	35	70°
0,40	35	35	70°
0,50	35	35	70°

\*Please contact our technical department for effective moment of inertia to be used in static calculations.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## PERFORATED CORNER PROFILE

Scan QR code for more information.



### Definition

Profiles, made of hot dip galvanized steels using cold forming method, used for enhancing strength in the wall and window corners.

### Usage Area

- Interior walls

### Technical Specifications

- Thickness: 0,25 mm - 0,35 mm
- Length: 2700-3000 mm
- Packaging: 40-50 pcs/bundle - 50 bundle/pallet
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Standards

Produced in accordance with TS EN 1435 Standard for Metal Bearings and Connecting Profiles Used With Gypsum Plaster Boards.

### Advantages


- Upholds plaster strongly thanks to special pattern hollow structure of the wings.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.




Thickness (mm)	a (mm)	b (mm)	c (°)
0,25	20	20	86°
0,30	20	20	86°
0,35	20	20	86°
0,25	21	21	86°
0,30	21	21	86°
0,35	21	21	86°
0,25	23	23	86°
0,30	23	23	86°
0,35	23	23	86°

\*Please contact our technical department for effective moment of inertia to be used in static calculations.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



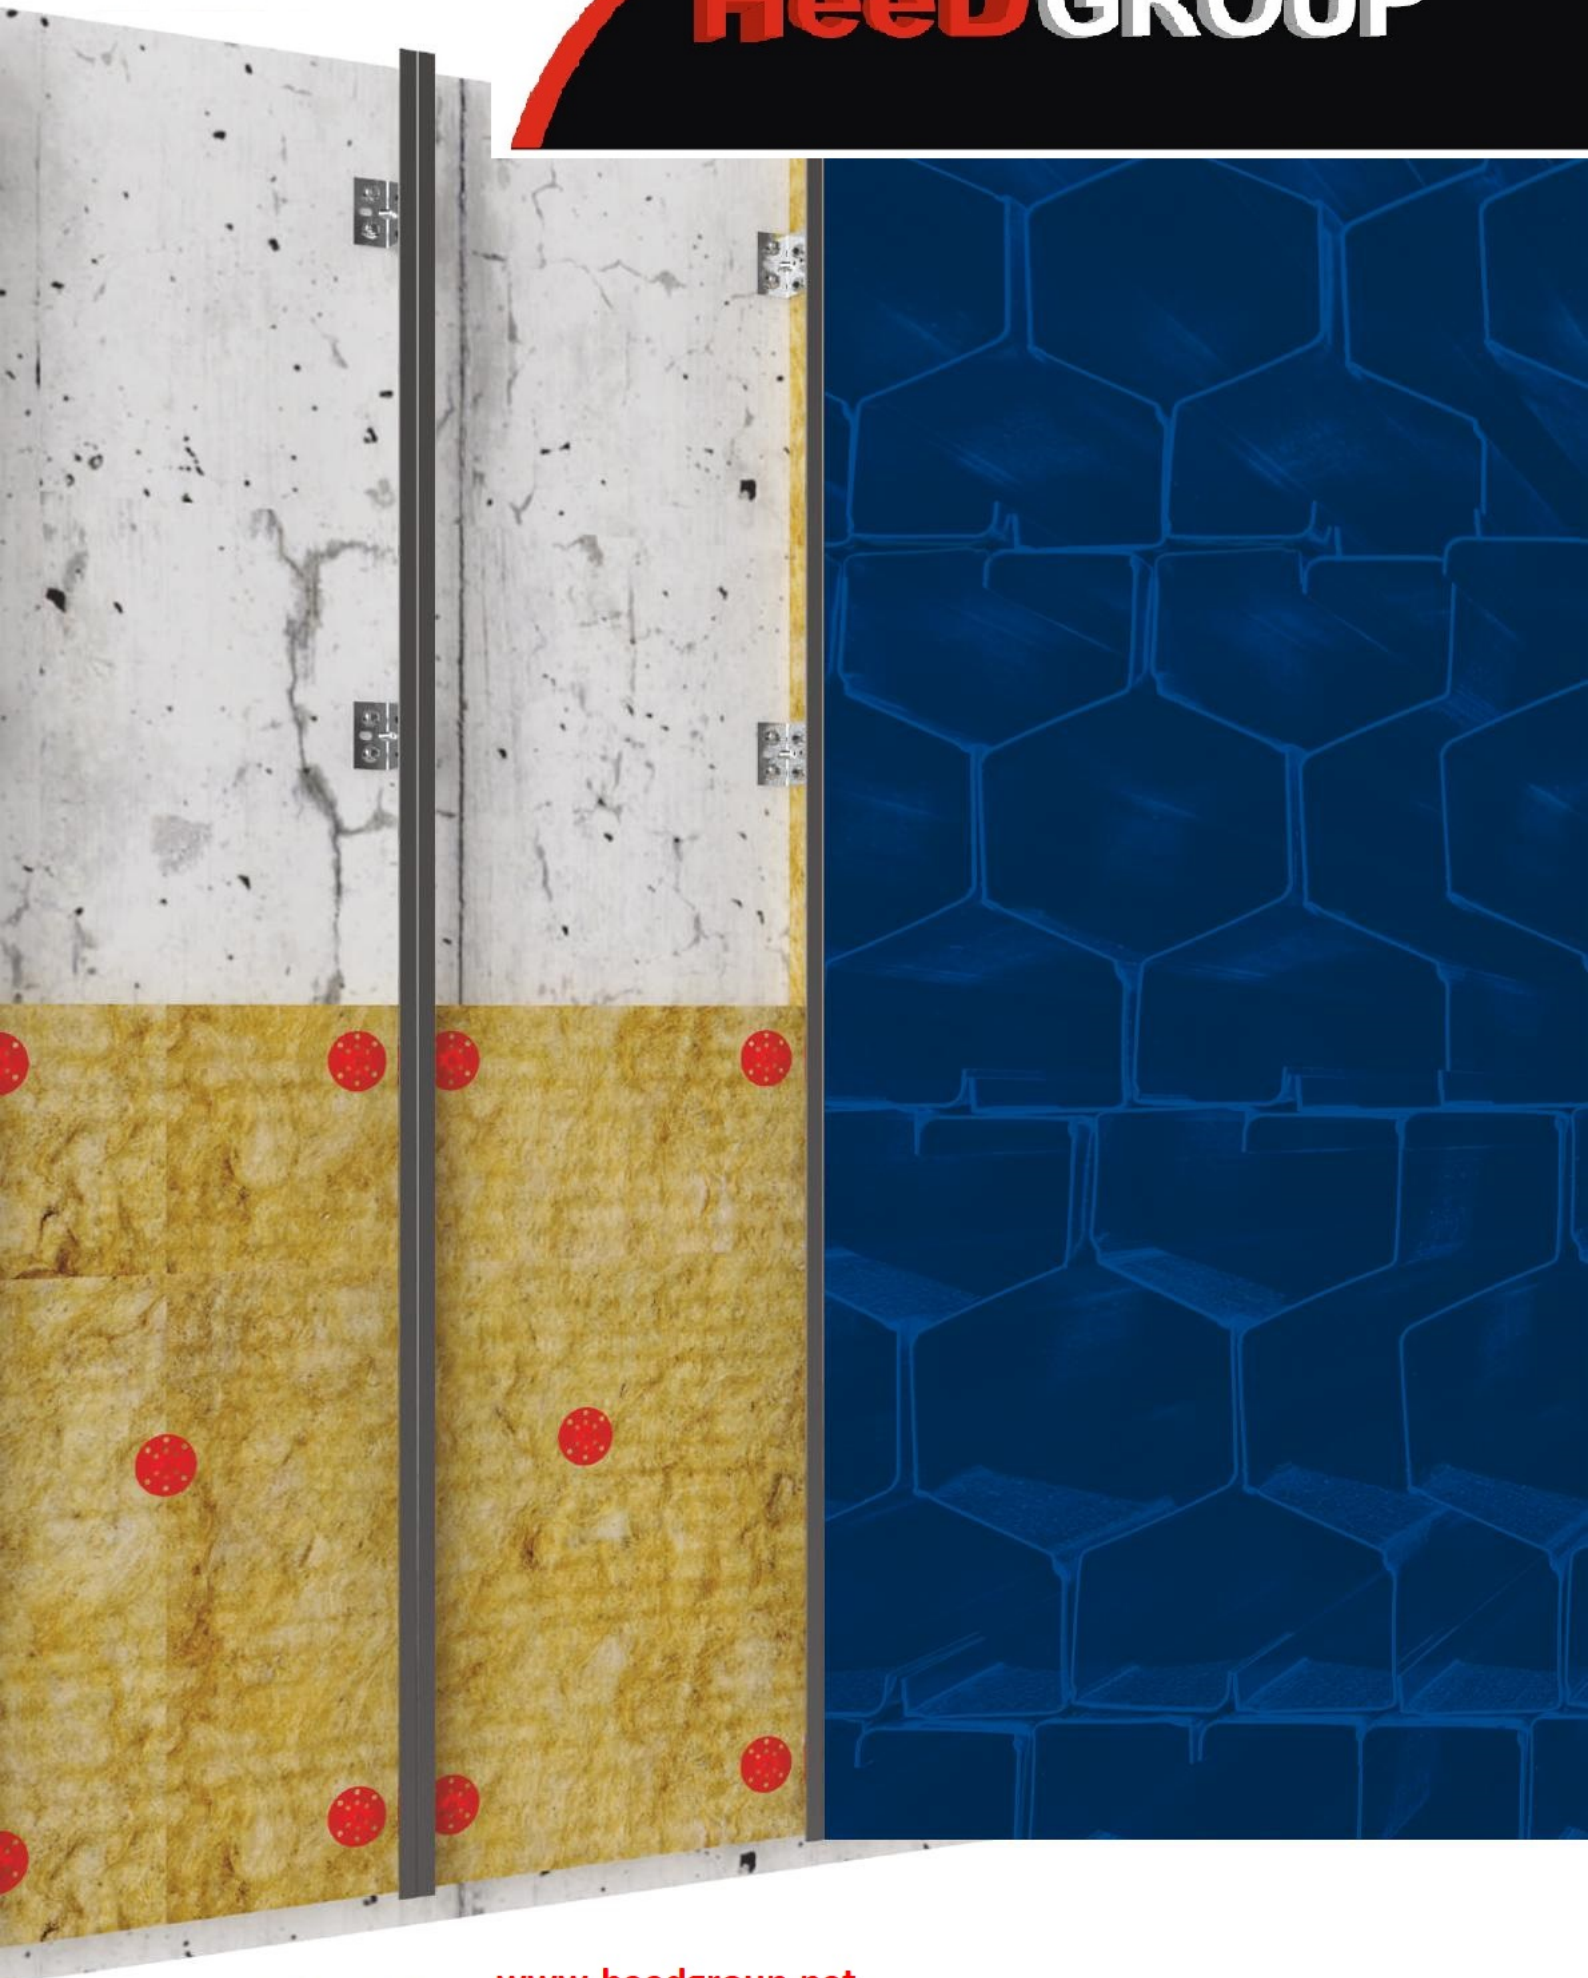

A dark blue background with a repeating pattern of lighter blue hexagons, creating a textured, stone-like appearance.

## **EXTERIOR WALL PROFILES**



## M PROFILE

Scan QR code for more information.



### Definition

Profiles that form a carrier surface for cement boards vertically by being fastened to box or J profiles made of hot dip galvanized steels using cold forming method.

### Usage Area

- Exterior wall systems

### Technical Specifications

- Thickness: 0,45 mm – 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Standards

- Produced in accordance with TSE K 236 for Metal Framework Components Used in Gypsum Cement-Bonded Particleboard Systems.

### Advantages


- Provides resistance to moisture and extends its life with TOC (Thin Organic Coating) coated material option.
- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

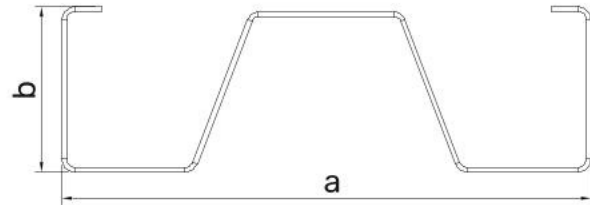

Thickness (mm)	a (mm)	b (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,45	80	25	0,6549	6,2244
0,50	80	25	0,7258	6,9012
0,45	80	22	0,4920	5,5905
0,50	80	22	0,5452	6,1963

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

J Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## J PROFILE

Scan QR code for more information.



### Definition

Profiles that form a carrier surface for M profiles horizontally by being fastened to L brackets made of hot dip galvanized steels using cold forming method.

### Usage Area

- Exterior wall systems

### Technical Specifications

- Thickness: 1,50 - 2,00 mm
- Length: 3000 mm standard length\*
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z140, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



Thickness (mm)	a (mm)	b (mm)	c (mm)	Ix* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
1,50	28	38	11	0,7773	2,7041
2,00	28	38	11	0,9728	3,4127

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

M Profile, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## CT PROFILE

Scan QR code for more information.



### Definition

Profiles that form a carrier surface for plaster based or cement boards vertically by being fastened to L brackets made of hot dip galvanized steels using cold forming method.

### Usage Area

- Exterior wall systems

### Technical Specifications

- Thickness: 0,90 mm
- Length: 3000 mm standard length\*
- Packaging: 6 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

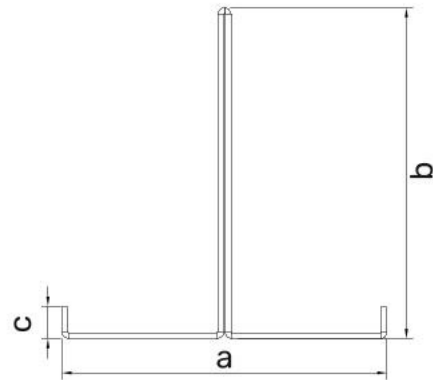

Thickness (mm)	a (mm)	b (mm)	c (mm)	Iy* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,90	50	50	5	1,3597	3,7284

\*Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Corner Profile, L Bracket, Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## L CORNER PROFILE

Scan QR code for more information.



### Definition

Non-carrier profiles, made of hot dip galvanized steels using cold forming method, used for enhancing strength in the board corners.

### Usage Area

- Exterior wall systems

### Technical Specifications

- Thickness: 0,50 mm
- Length: 3000 mm standard length\*
- Packaging: 25 pcs/bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

\*Production at a range of 2000-8000 mm is provided for special orders.

### Advantages


- Can be manufactured at any length.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of profiles with water during storage and shipping.

### Recycling

- During recycling of the profile, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

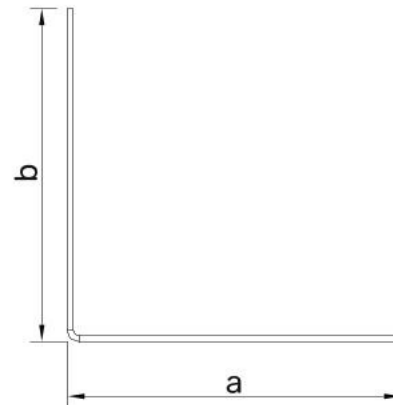

Thickness (mm)	a (mm)	b (mm)	Iy* (cm <sup>4</sup> )	Iy* (cm <sup>4</sup> )
0,50	30	30	0,1079	0,4389
0,50	50	50	0,5080	2,0523

\* Please contact our technical department for effective moment of inertia to be used in static calculations.

### Supplementary Products

Screws and UMS Accessories

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.









## **ACCESSORIES**

[www.heedgroup.net](http://www.heedgroup.net)

**#onestepahead**

## CLIP

Scan QR code for more information.



### Definition

Fasteners that connect Main and Auxiliary Carrier Ceiling C Profiles made of hot dip galvanized steels using cold forming method.

### Usage Area

Fitted into auxiliary profiles in the metal construction installed for building plaster board suspended ceiling, folded down on the main profile thereby connecting profiles to each other.

### Technical Specifications

- Packaging: 500 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$


\*Production at a range of 2000-8000 mm is provided for special orders.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

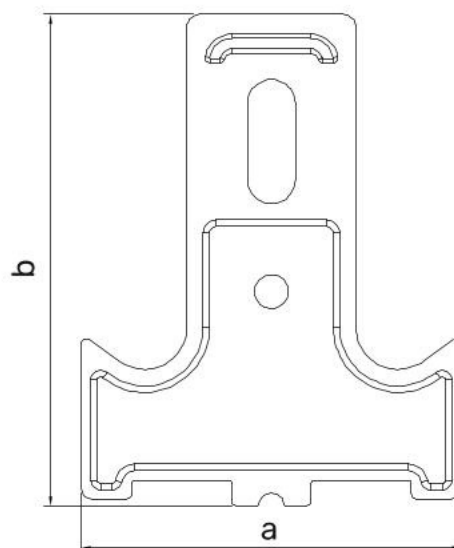

a (mm)	b (mm)
58,50	75,60

### Supplementary Products

Ceiling C Profile

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## ANCHOR CLIP

Scan QR code for more information.



### Definition

Fasteners that connect Main and Auxiliary Carrier Ceiling C Profiles made of hot dip galvanized steels using cold forming method.

### Usage Area

Fitted into auxiliary profiles in the metal construction installed for building plaster board suspended ceiling, folded down on the main profile thereby connecting profiles to each other.

### Technical Specifications

- Packaging: 500 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$


\*Production at a range of 2000-8000 mm is provided for special orders.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

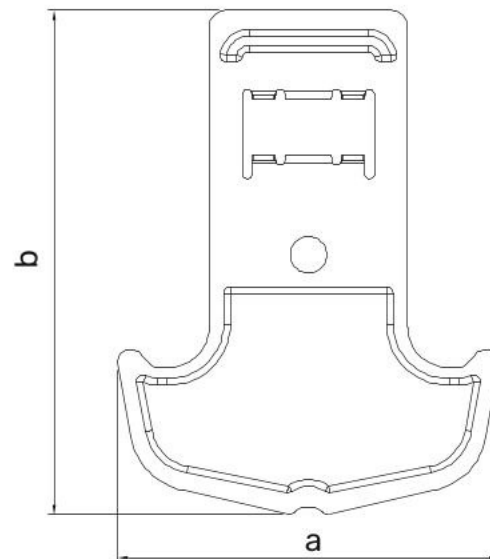

a (mm)	b (mm)
57,70	76,30

### Supplementary Products

Ceiling C Profile

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## HANGER CLIP

Scan QR code for more information.



### Definition

Fasteners that are fitted into Main and Auxiliary Carrier Ceiling C Profiles in metal construction installed for building suspended ceiling and hung on steel dowels mounted to reinforced-concrete ceiling by means of suspension rods and that ensure suspension of the system.

### Usage Area

Affixed to suspension rod in the metal construction installed for building suspended ceiling and mounted to main carrier Ceiling C profiles.

### Technical Specifications


- Packaging: 500 pcs/box
- Steel Type: DX51D (Clip) - CK 75 (Spring)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

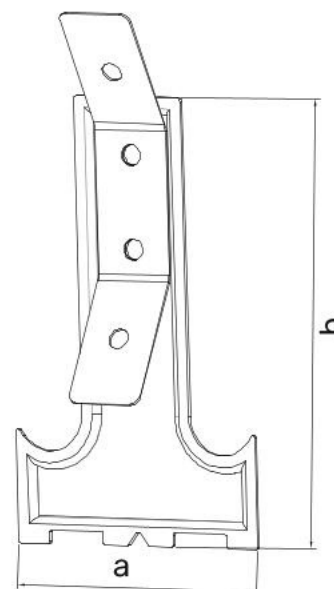

a (mm)	b (mm)
58,00	95,00

### Supplementary Products

Ceiling C Profile, Suspension Rod

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## NEW HANGER CLIP

### Definition

Fasteners that are fitted into Main and Auxiliary Carrier Ceiling C Profiles in metal construction installed for building suspended ceiling and hung on steel dowels mounted to reinforced-concrete ceiling by means of suspension rods and that ensure suspension of the system.

### Usage Area

Affixed to suspension rod in the metal construction installed for building suspended ceiling and mounted to main carrier Ceiling C profiles.

### Technical Specifications


- Packaging: 500 pcs/box
- Steel Type: DX51D (Clip) - CK 75
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

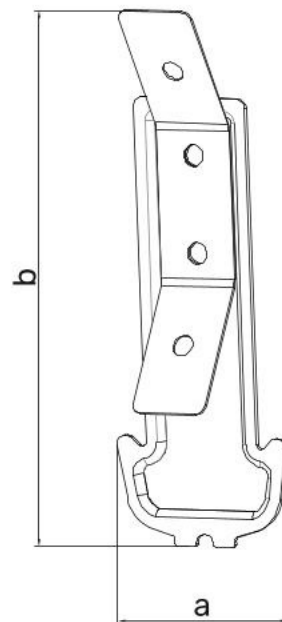

a (mm)	b (mm)
40,00	95,00

### Supplementary Products

Ceiling C Profile, Suspension Rod

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## NEW CLIP

### Definition

Fasteners that connect Main and Auxiliary Carrier Ceiling C Profiles made of hot dip galvanized steels using cold forming method.

### Usage Area

Fitted into auxiliary profiles in the metal construction installed for building plaster board suspended ceiling, folded down on the main profile thereby connecting profiles to each other.

### Technical Specifications

- Packaging: 500 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$


\*Production at a range of 2000-8000 mm is provided for special orders.

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

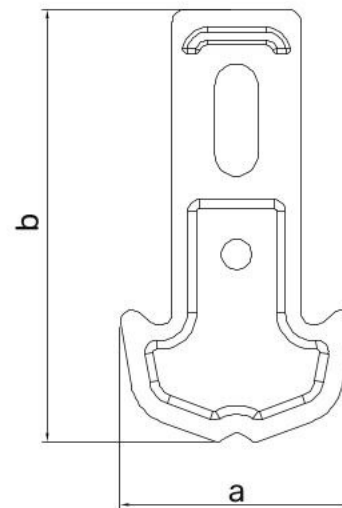

a (mm)	b (mm)
39,80	73,80

### Supplementary Products

Ceiling C42 Profile

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## BRACKET

Scan QR code for more information.



### Definition

Fastener used to hold Main Carrier Ceiling C profiles.

### Usage Area

Used in suspended ceiling and wall cladding applications. Used instead of suspension rod and hanger clip in cases where the distance between the existing covering and suspended ceiling is short in suspended ceiling application. It is fixed onto the existing construction wall in order to remove flexion and increase resistance of clad wall in wall cladding application.

### Technical Specifications

- Packaging: 500 pcs/pack
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.



### Sizes (a)

7 cm, 12 cm, 15 cm, 20 cm, 25 cm, 30 cm

### Supplementary Products

Ceiling C Profile, Screws

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## EXTENSION PIECE

Scan QR code for more information.



### Definition

A fastener used to splice two Ceiling C Profiles.

### Usage Area

Used to splice and extend the length of Ceiling C Profiles.

### Technical Specifications


- Packaging: 500 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140$  N/mm

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

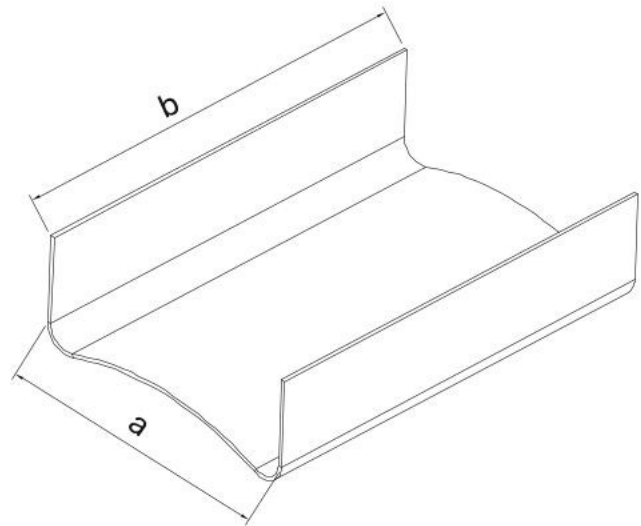

a (mm)	b (mm)
58,50	85,00

### Supplementary Products

Ceiling C Profile

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## NEW EXTENSION PIECE

Scan QR code for more information.



### Definition

A fastener used to splice two Ceiling C Profiles.

### Usage Area

Used to splice and extend the length of Ceiling C 42 Profiles.

### Technical Specifications


- Packaging: 500 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

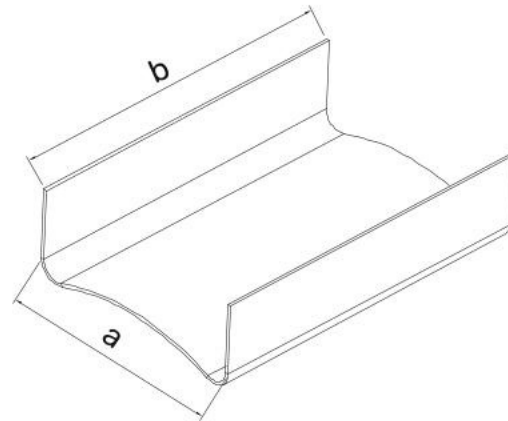

a (mm)	b (mm)
40,50	82,00

### Supplementary Products

Ceiling C 42 Profile

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## L BRACKET

Scan QR code for more information.



### Definition

L shaped carrier fastener that forms support point for remaining carrier profiles of the system by being fixed to the construction with wall plug and screw.

### Usage Area

Used for fastening frontage profiles in exterior wall applications.

### Technical Specifications


- Thickness: 2 - 3 mm
- Packaging: 15 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

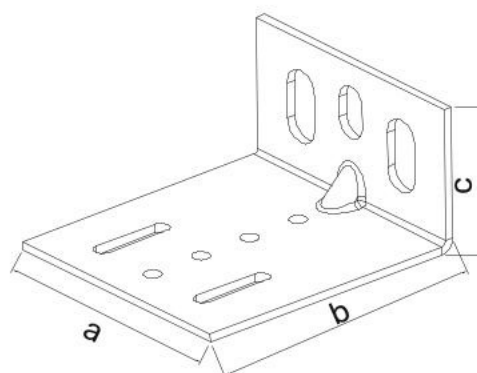

Thickness (mm)	a (mm)	b (mm)	c (mm)
2,00	90	80	50
2,00	90	100	50
2,00	90	120	50
2,00	90	150	50
2,00	90	200	50
2,00	90	250	50
2,50	90	80	50
2,50	90	100	50
2,50	90	120	50
2,50	90	150	50
2,50	90	200	50
2,50	90	250	50
3,00	90	80	50
3,00	90	100	50
3,00	90	120	50
3,00	90	150	50
3,00	90	200	50
3,00	90	250	50

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## L BRACKET

Scan QR code for more information.



### Definition

L shaped carrier fastener that forms support point for remaining carrier profiles of the system by being fixed to the construction with wall plug and screw.

### Usage Area

Used for fastening frontage profiles in exterior wall applications.

### Technical Specifications


- Thickness: 2 - 3 mm
- Packaging: 15 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100, Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

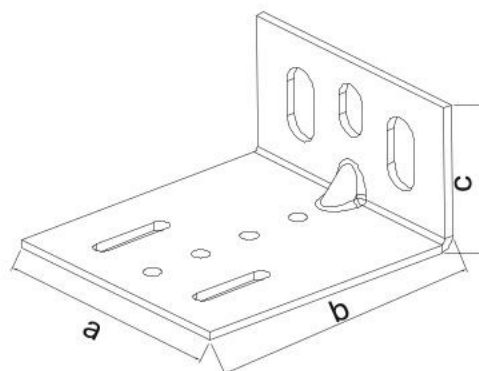

Thickness (mm)	a (mm)	b (mm)	c (mm)
2,00	100	80	50
2,00	100	100	50
2,00	100	120	50
2,00	100	150	50
2,00	100	200	50
2,00	100	250	50
2,50	100	80	50
2,50	100	100	50
2,50	100	120	50
2,50	100	150	50
2,50	100	200	50
2,50	100	250	50
3,00	100	80	50
3,00	100	100	50
3,00	100	120	50
3,00	100	150	50
3,00	100	200	50
3,00	100	250	50

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## DOUBLE SPRING

Scan QR code for more information.



### Definition

Fasteners used to splice suspension rods made of CK 75 steel using cold forming method.

### Usage Area

Fastener that connects two suspension rods in Suspended Ceiling Systems.

### Technical Specifications


- Packaging: 500 pcs/box
- Steel Type: CK 75
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

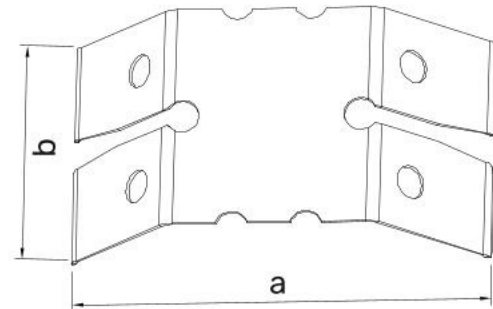

a (mm)	b (mm)
56,20	30,50

### Supplementary Products

Suspension Rod

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## UA BRACKET

### Definition

Fasteners used to fix UA profiles, which are utilized to produce reinforced door frames, to ceiling and floor.

### Usage Area

- Partition wall systems

### Technical Specifications


- Thickness: 2,00 mm
- Packaging: 15 pcs / bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z275
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

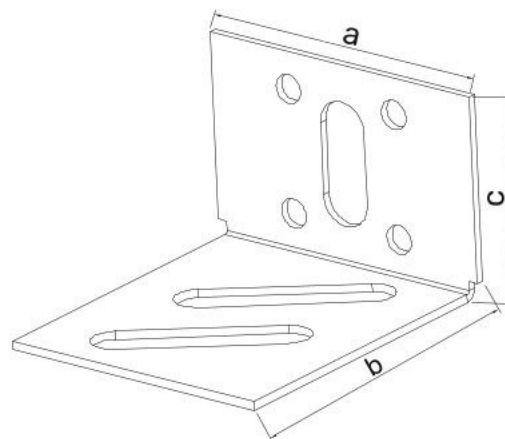

Thickness (mm)	a (mm)	b (mm)	c (mm)
2,00	50	80	50
2,00	75	80	50
2,00	100	80	50

### Supplementary Products

UA Profile, Wall U Profile, Screws

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## SEISMIC CLIP

Scan QR code for more information.



### Definition

Fasteners used to connect Ceiling C profile and Seismic U profile in seismic suspended ceiling systems made of hot dip galvanized steels using cold forming method.

### Usage Area

Allows mobility of Ceiling C profiles in metal construction installed for building plasterboard suspended ceiling. Has a special technicality at the junction point of seismic clip and the edge, which allows it to be fitted into Ceiling U Profile.

### Technical Specifications


- Packaging: 250 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

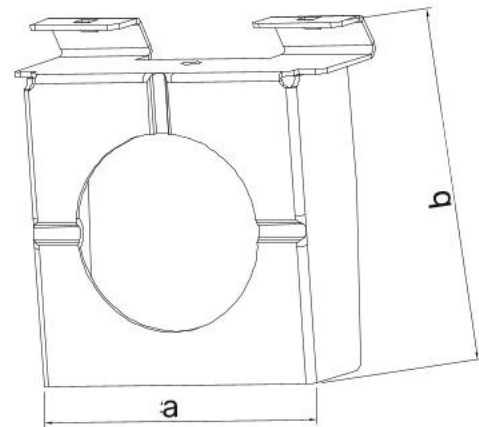

a (mm)	b (mm)
58,50	69,00

### Supplementary Products

Ceiling C Profile, Seismic U Profile



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.



## CEILING L BRACKET

### Definition

L-shaped fasteners used to fasten L corner profiles with steel dowels in omega suspended ceiling systems made of hot dip galvanized steels using cold forming method.

### Usage Area

Used to fix L suspension Profile, which is mounted to Omega Ceiling U profile in construction of suspended ceiling applications with Omega Profile, onto the ceiling via steel dowels.

### Technical Specifications


- Packaging: 500 pcs/box
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z100

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

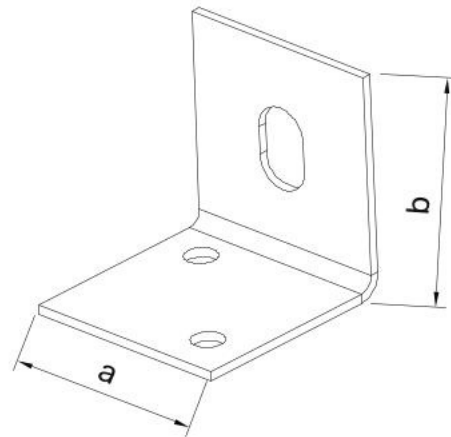

a (mm)	b (mm)
23,00	23,00

### Supplementary Products

L Suspension Profile, Steel Dowel

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.

## SUSPENSION ROD

Scan QR code for more information.



### Definition

Fasteners that provide connection of hanger clip and steel dowel in suspended ceiling systems.

### Usage Area

- Suspended ceiling systems

### Technical Specifications


- Diameter: Ø 3,50 mm
- Packaging: 100 pcs / bundle
- Steel Type: DX51D (complies with EN 10346 Standard)
- Galvanized Thickness: Z45
- Fire Resistance Rating: Class A1
- Yield Strength:  $\geq 140 \text{ N/mm}^2$

### Storage and Shipping

- Necessary measures must be taken in order to avoid contact of accessories with water during storage and shipping.

### Recycling

- During recycling of the accessories, if it contains glass wool and/or plaster board residues, it should be treated as construction and destruction residue. Otherwise, it should be classified as metal waste.

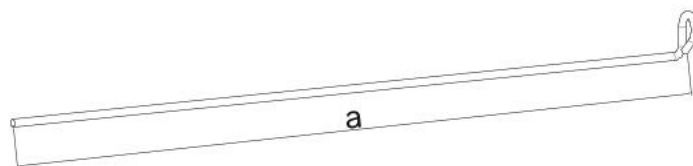

### Sizes (a)

20 cm, 30 cm, 40 cm, 50 cm, 60 cm, 80 cm, 100 cm, 120 cm, 150 cm, 200 cm, 250 cm, 300 cm, 350 cm, 400 cm

### Supplementary Products

Hanger Clip, Steel Dowel

### Application

See UMS Application Catalogue for application details.



Technical information and recommendations for end-use of the product are designed based on current knowledge and experience of UMS for appropriate storage, delivery and use of the products under normal circumstances and throughout their useful lives. It is the responsibility of the user to know of and use the latest and updated version of the technical data sheet for the product a copy of which may be provided upon request. It may not be reproduced and shared with third parties without prior permission.